

Linear Electric Actuator

Series AELB

Cat :

Rod less Belt drive Electric Actuator - 50mm

Features

- Compact Robust Design
- Highly flexible mounting
- More Precise & positioning
- Ease of positioning
- Ease of Maintenance




Technical Specifications

Repeatability (mm)		±0.04
Motor Power (Maximum Static Torque in Nm)		0.32 (Stepper Motor)
Lead (mm)		32
Maximum Speed (mm)/s		267
Maximum Payload	Horizontal (Kg)	10
	Vertical (Kg)	-
Rated Thrust (N)		42
Stroke (mm)		50-800 mm
Belt width (mm)		9
High Rigidity Linear Guide (mm)		W24XH8.5
Home Sensor	Outside	EE-SX672 (NPN)


*Acceleration & deceleration value is set as 0.4 seconds

Allowable Moment


Static loading moment



Unit:mm



Unit:mm



Unit:Nm

Horizontal Installation	A	B	C
5Kg	323	23	52
7Kg	208	15	34
10Kg	121	9	20

Wall Installation	A	B	C
5Kg	47	21	299
7Kg	31	13	191
10Kg	18	8	109

MY	16
MP	20
MR	19

Note:


- The torque value in the chart indicates the center of gravity.
- Operation life is 5000Km when the product is using under the specified conditions.
- Data information is not for ceiling-mount inverse use. Contact us for the details if you want to apply ceiling- mount inverse usage

Linear Electric Actuator

Series AELB


Cat :

Motor Bottom side-B

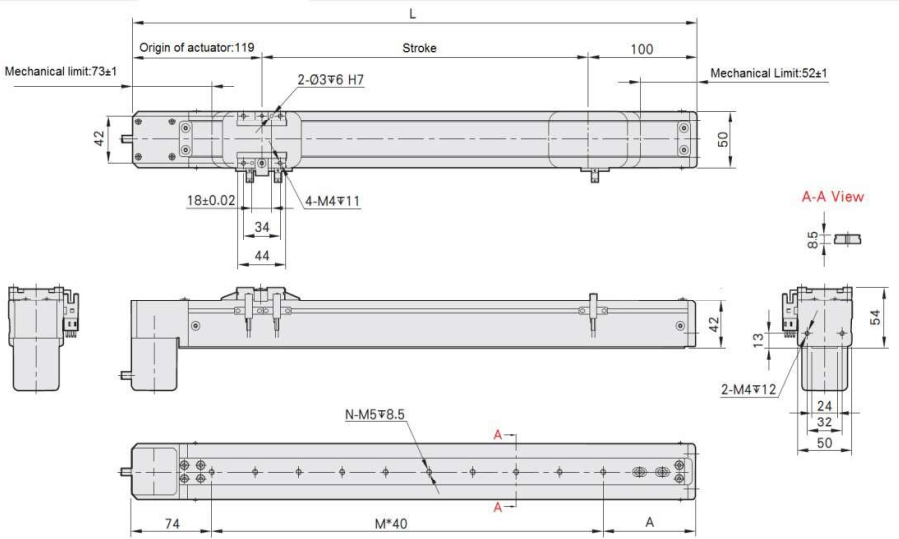

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	269	319	369	419	469	519	569	619	669	719	769	819	869	919	969	1019
A	75	85	95	65	75	85	95	65	75	85	95	65	75	85	95	65
M	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	22
N	4	5	6	8	9	10	11	13	14	15	16	18	19	20	21	23
Weight (Kg)*	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3	3.1	3.2	3.3	3.4	3.5	3.6

Motor Top side-T

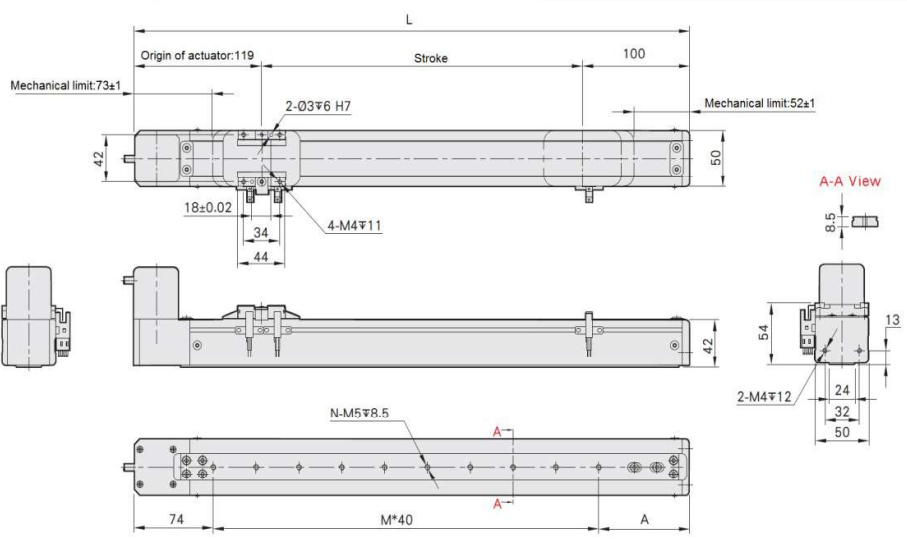


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	269	319	369	419	469	519	569	619	669	719	769	819	869	919	969	1019
A	75	85	95	65	75	85	95	65	75	85	95	65	75	85	95	65
M	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	22
N	4	5	6	8	9	10	11	13	14	15	16	18	19	20	21	23
Weight (Kg)*	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3	3.1	3.2	3.3	3.4	3.5	3.6

Linear Electric Actuator

Series AELB

Cat :

How to order

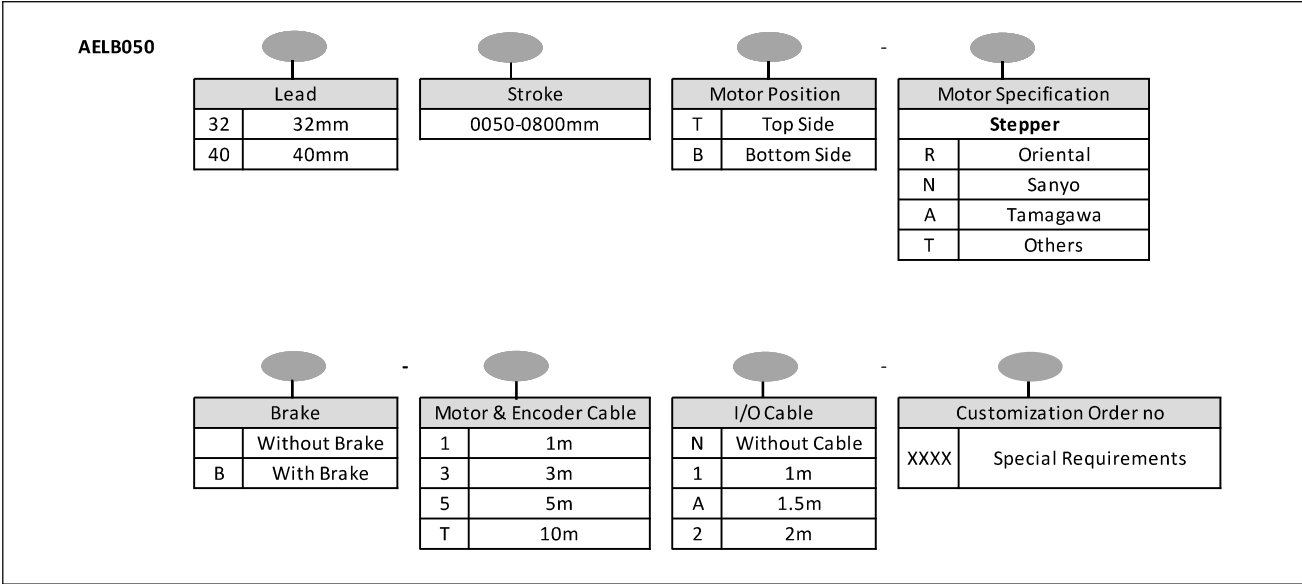

Example :1

Ordering no. for Rodless belt drive electric actuator 50mm size,32mm belt lead,150 mm stroke with Oriental stepper motor mounted at the bottom side, with 3m Motor cable.

AELB050320150B-R-3N

Example :2

Ordering no. for Rodless belt drive electric actuator 50mm size,32mm belt lead,150 mm stroke without Oriental stepper motor mounted at the bottom side.

AELB050320150B-R

Linear Electric Actuator

Series AELB

Cat :

Rod less Belt drive Electric Actuator - 50mm

Features

- ❑ Compact Robust Design
- ❑ Highly flexible mounting
- ❑ More Precise & positioning
- ❑ Ease of positioning
- ❑ Ease of Maintenance




Technical Specifications

Repeatability (mm)		±0.04
Motor Power (AC Servo in W)		100
Lead (mm)		40
Maximum Speed (mm)/s		2000
Maximum Payload	Horizontal (Kg)	3
	Vertical (Kg)	-
Rated Thrust (N)		42
Stroke (mm)		50-800 mm
Belt width (mm)		9
High Rigidity Linear Guide (mm)		W24XH8.5
Home Sensor	Outside	EE-SX672 (NPN)


*Acceleration & deceleration value is set as 0.4 seconds

Allowable Moment



Unit:mm


Horizontal Installation	A	B	C
2Kg	323	61	112
3Kg	209	39	72



Unit:mm

Wall Installation	A	B	C
2Kg	105	57	303
3Kg	67	36	195

Static loading moment



Unit:Nm

MY	16
MP	20
MR	19

Note:


- The torque value in the chart indicates the center of gravity.
- Operation life is 5000Km when the product is using under the specified conditions.
- Data information is not for ceiling-mount inverse use. Contact us for the details if you want to apply ceiling- mount inverse usage

Linear Electric Actuator

Series AELB


Cat :

Motor Bottom side-B

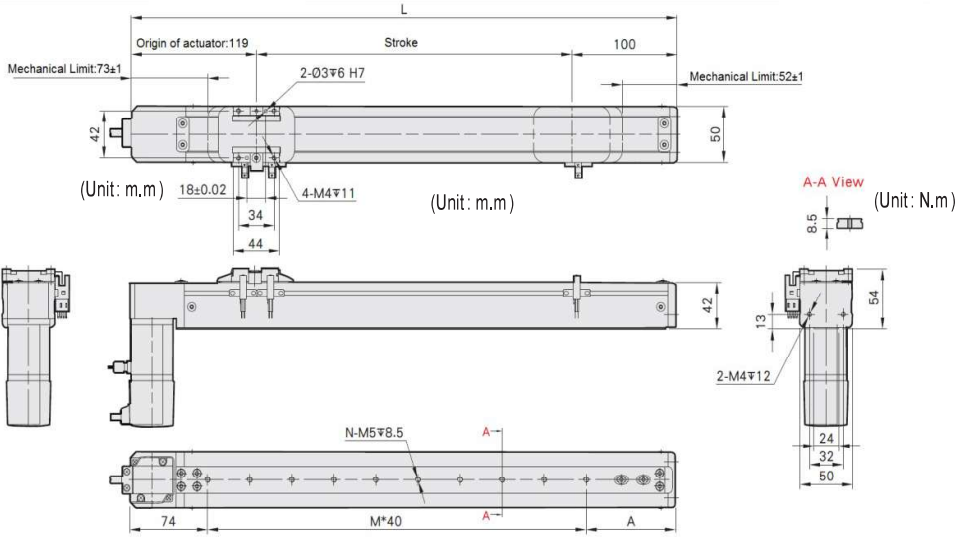

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	269	319	369	419	469	519	569	619	669	719	769	819	869	919	969	1019
A	75	85	95	65	75	85	95	65	75	85	95	65	75	85	95	65
M	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	22
N	4	5	6	8	9	10	11	13	14	15	16	18	19	20	21	23
Weight (Kg)*	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3	3.1	3.2	3.3	3.4	3.5	3.6

Motor Top side-T

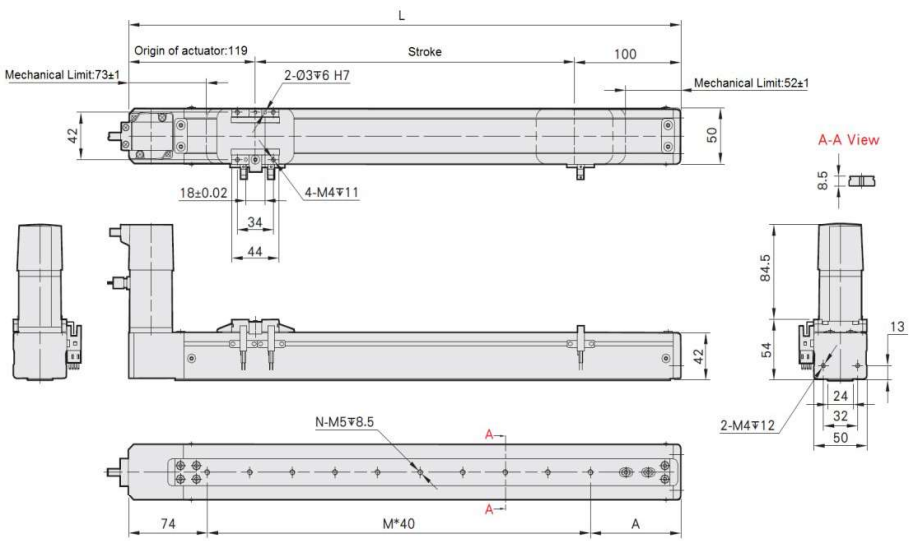

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	269	319	369	419	469	519	569	619	669	719	769	819	869	919	969	1019
A	75	85	95	65	75	85	95	65	75	85	95	65	75	85	95	65
M	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	22
N	4	5	6	8	9	10	11	13	14	15	16	18	19	20	21	23
Weight (Kg)*	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3	3.1	3.2	3.3	3.4	3.5	3.6

Linear Electric Actuator

Series AELB

Cat :

How to order

AELB050

Lead		Stroke		Motor Position		Motor Specification		Motor Power	
32	32mm	0050-0800mm		T	Top Side	AC Servo		AC Servo	
40	40mm			B	Bottom Side	D	Delta	B	100W
						Y	Yaskawa		
						M	Mitsubishi		
						P	Panasonic		
						V	INVT		
						T	Others		

Brake		Encoder Type		Communication Type		Motor & Encoder Cable		I/O Cable	
	Without Brake		Incremental		Basic Type	1	1m	N	Without Cable (Stand.)
B	With Brake	A	Absolute	C0	Modbus	3	3m	1	1m
				C1	CAN Open	5	5m	A	1.5m
				C2	Ether CAT	T	10m	2	2m
				C3	PROFINET				
				C4	PROFIBUS				
				C5	Ethernet/IP				
				C6	Other Protocol - 1				
				C7	Other Protocol - 2				
				C8	Own Protocol -1*				
				C9	Own Protocol -2*				

Note : * Based on Motor make

Customization Order no	
XXXX	Special Requirements

Example :1

Ordering no. for Rodless belt drive electric actuator 50mm size,32mm belt lead,150 mm stroke with Delta 100W Servo motor mounted at the bottom side, with 3m Motor cable.

AELB050320150B-DB-3N

Example :2

Ordering no. for Rodless belt drive electric actuator 50mm size,32mm belt lead,150 mm stroke without Delta 100W Servo motor mounted at the bottom side.

AELB050320150B-DB

Linear Electric Actuator

Series AELB

Cat :

Rod less Belt drive Electric Actuator - 65mm

Features

- ❑ Compact Robust Design
- ❑ Highly flexible mounting
- ❑ More Precise & positioning
- ❑ Ease of positioning
- ❑ Ease of Maintenance




Technical Specifications

Repeatability (mm)		±0.04
Motor Power (Maximum Static Torque in Nm)		0.39 (Stepper Motor)
Lead (mm)		40
Maximum Speed (mm)/s		333
Maximum Payload	Horizontal (Kg)	15
	Vertical (Kg)	-
Rated Thrust (N)		51
Stroke (mm)		50-800 mm
Belt width (mm)		12
High Rigidity Linear Guide (mm)		W42XH9.5
Home Sensor	Outside	EE-SX672 (NPN)


*Acceleration & deceleration value is set as 0.4 seconds

Allowable Moment


Static loading moment



Unit:mm



Unit:mm



Unit:Nm

Horizontal Installation	A	B	C
5Kg	620	65	165
10Kg	253	29	73
15kg	126	16	42

Wall Installation	A	B	C
5Kg	151	59	582
10Kg	66	26	532
15kg	38	15	111

MY	70
MP	80
MR	75

Note:


- The torque value in the chart indicates the center of gravity.
- Operation life is 5000Km when the product is using under the specified conditions.
- Data information is not for ceiling-mount inverse use. Contact us for the details if you want to apply ceiling- mount inverse usage

Linear Electric Actuator

Series AELB


Cat :

Motor Bottom side-B

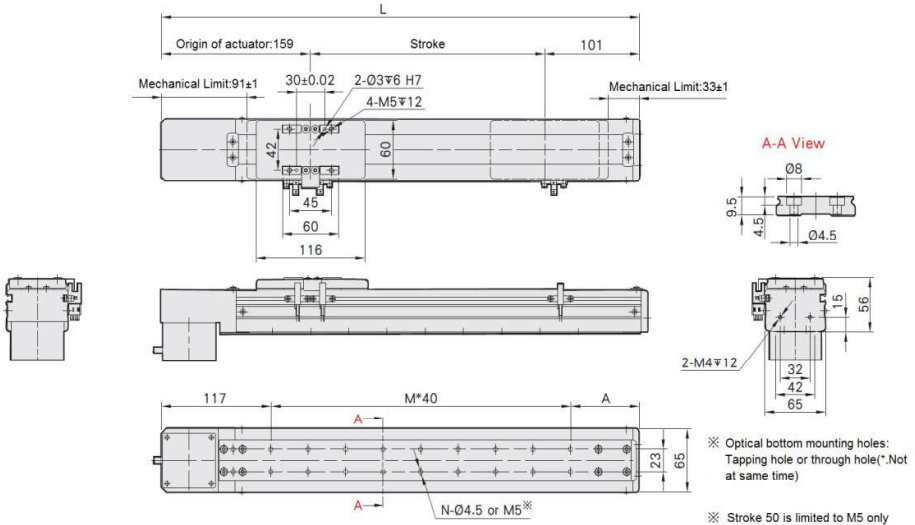

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	310	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060
A	73	83	93	63	73	83	93	63	73	83	93	63	73	83	93	63
M	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	22
Weight (Kg)*	2.5	2.5	2.6	2.8	3	3.3	3.4	3.5	3.7	3.9	4.1	4.2	4.4	4.6	4.8	4.9

Motor Top side-T

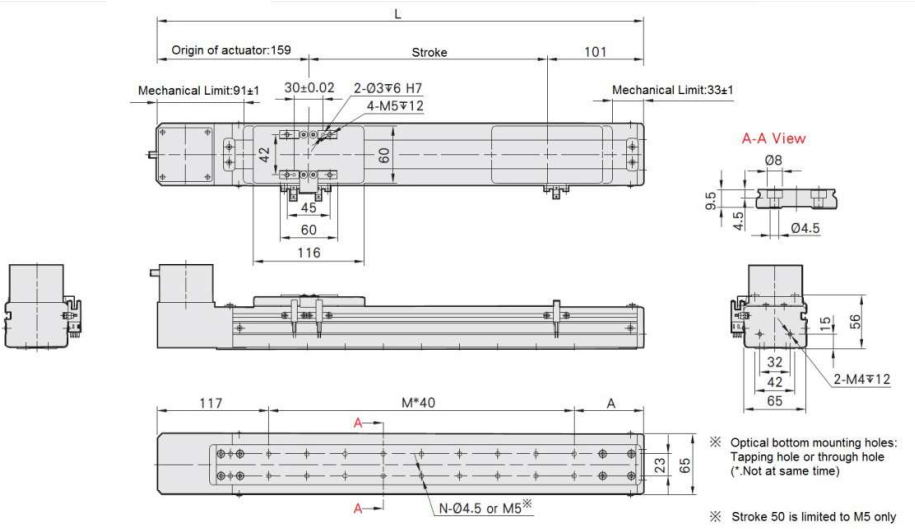

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	310	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060
A	73	83	93	63	73	83	93	63	73	83	93	63	73	83	93	63
M	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	22
N	8	10	12	16	18	20	22	26	28	30	32	36	38	40	42	46
Weight (Kg)*	2.5	2.5	2.6	2.8	3	3.3	3.4	3.5	3.7	3.9	4.1	4.2	4.4	4.6	4.8	4.9

Linear Electric Actuator

Series AELB

Cat :

How to order

AELB065

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Lead</th></tr> <tr><td style="width: 20%;">40</td><td>40mm</td></tr> </table>	Lead		40	40mm	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Stroke</th></tr> <tr><td colspan="2">0050-0800mm</td></tr> </table>	Stroke		0050-0800mm		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Position</th></tr> <tr><td style="width: 20%;">T</td><td>Top Side</td></tr> <tr><td>B</td><td>Bottom Side</td></tr> </table>	Motor Position		T	Top Side	B	Bottom Side	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Specification</th></tr> <tr><th colspan="2">Stepper</th></tr> <tr><td style="width: 20%;">R</td><td>Oriental</td></tr> <tr><td>N</td><td>Sanyo</td></tr> <tr><td>A</td><td>Tamagawa</td></tr> <tr><td>T</td><td>Others</td></tr> </table>	Motor Specification		Stepper		R	Oriental	N	Sanyo	A	Tamagawa	T	Others
Lead																													
40	40mm																												
Stroke																													
0050-0800mm																													
Motor Position																													
T	Top Side																												
B	Bottom Side																												
Motor Specification																													
Stepper																													
R	Oriental																												
N	Sanyo																												
A	Tamagawa																												
T	Others																												

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Brake</th></tr> <tr><td style="width: 20%;"></td><td>Without Brake</td></tr> <tr><td>B</td><td>With Brake</td></tr> </table>	Brake			Without Brake	B	With Brake	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor & Encoder Cable</th></tr> <tr><td style="width: 20%;">1</td><td>1m</td></tr> <tr><td>3</td><td>3m</td></tr> <tr><td>5</td><td>5m</td></tr> <tr><td>T</td><td>10m</td></tr> </table>	Motor & Encoder Cable		1	1m	3	3m	5	5m	T	10m	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">I/O Cable</th></tr> <tr><td style="width: 20%;">N</td><td>Without Cable</td></tr> <tr><td>1</td><td>1m</td></tr> <tr><td>A</td><td>1.5m</td></tr> <tr><td>2</td><td>2m</td></tr> </table>	I/O Cable		N	Without Cable	1	1m	A	1.5m	2	2m	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Customization Order no</th></tr> <tr><td style="width: 20%;">XXXX</td><td>Special Requirements</td></tr> </table>	Customization Order no		XXXX	Special Requirements
Brake																																	
	Without Brake																																
B	With Brake																																
Motor & Encoder Cable																																	
1	1m																																
3	3m																																
5	5m																																
T	10m																																
I/O Cable																																	
N	Without Cable																																
1	1m																																
A	1.5m																																
2	2m																																
Customization Order no																																	
XXXX	Special Requirements																																

Example :1

Ordering no. for Rodless belt drive electric actuator 65mm size,40mm belt lead,150 mm stroke with Oriental stepper motor mounted at the bottom side, with 3m Motor cable.

AELB065400150B-R-3N

Example :2

Ordering no. for Rodless belt drive electric actuator 65mm size,40mm belt lead,150 mm stroke without Oriental stepper motor mounted at the bottom side.

AELB065400150B-R

Linear Electric Actuator

Series AELB

Cat :

Rod less Belt drive Electric Actuator - 65mm

Features

- Compact Robust Design
- Highly flexible mounting
- More Precise & positioning
- Ease of positioning
- Ease of Maintenance




Technical Specifications

Repeatability (mm)		±0.04
Motor Power (AC Servo in W)		100
Lead (mm)		40
Maximum Speed (mm)/s		2000
Maximum Payload	Horizontal (Kg)	3
	Vertical (Kg)	-
Rated Thrust (N)		42
Stroke (mm)		50-800 mm
Belt width (mm)		12
High Rigidity Linear Guide (mm)		W42XH9.5
Home Sensor	Outside	EE-SX672 (NPN)


*Acceleration & deceleration value is set as 0.4 seconds

Allowable Moment


Static loading moment



Unit:mm



Unit:mm



Unit:Nm

Horizontal Installation	A	B	C
2Kg	520	150	254
3Kg	340	97	165

Wall Installation	A	B	C
2Kg	238	140	488
3Kg	155	91	319

MY	70
MP	80
MR	75

Note:


- The torque value in the chart indicates the center of gravity.
- Operation life is 5000Km when the product is using under the specified conditions.
- Data information is not for ceiling-mount inverse use. Contact us for the details if you want to apply ceiling- mount inverse usage

Linear Electric Actuator

Series AELB


Cat :

Motor Bottom side-B

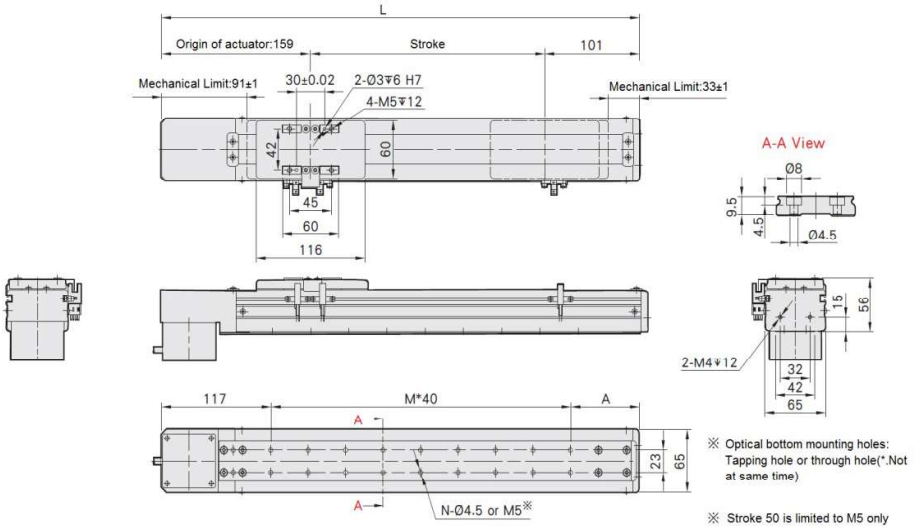

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	310	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060
A	73	83	93	63	73	83	93	63	73	83	93	63	73	83	93	63
M	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	22
N	8	10	12	16	18	20	22	26	28	30	32	36	38	40	42	46
Weight (Kg)*	2.5	2.5	2.6	2.8	3	3.3	3.4	3.5	3.7	3.9	4.1	4.2	4.4	4.6	4.8	4.9

Motor Top side-T

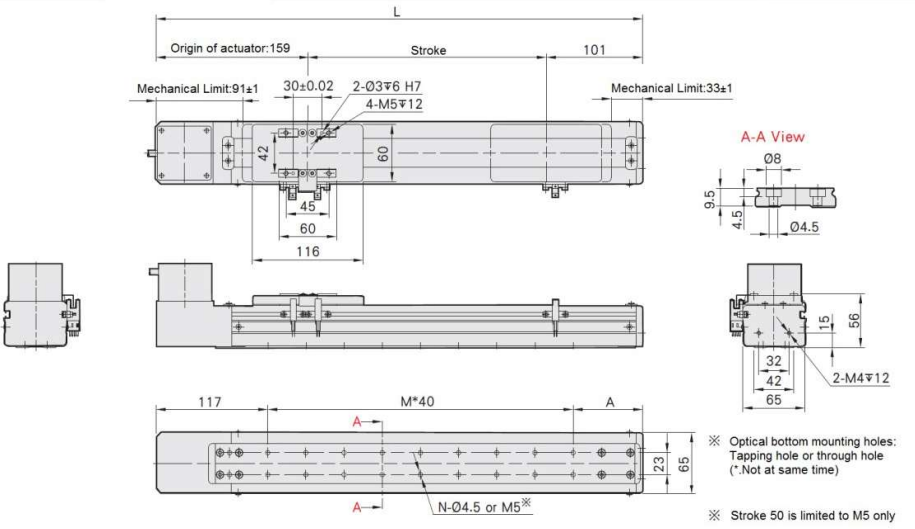

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	310	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060
A	73	83	93	63	73	83	93	63	73	83	93	63	73	83	93	63
M	3	40.	5	7	8	9	10	12	13	14	15	17	18	19	20	22
N	8	10	12	16	18	20	22	26	28	30	32	36	38	40	42	46
Weight (Kg)*	2.5	2.5	2.6	2.8	3	3.3	3.4	3.5	3.7	3.9	4.1	4.2	4.4	4.6	4.8	4.9

Linear Electric Actuator

Series AELB

Cat :

How to order

AELB065

Lead	Stroke	Motor Position	Motor Specification	Motor Power
40 40mm	0050-0800mm	T Top Side B Bottom Side	AC Servo D Delta Y Yaskawa M Mitsubishi P Panasonic V INVT T Others	AC Servo B 100W

Brake	Encoder Type	Communication Type	Motor & Encoder Cable	I/O Cable
Without Brake B With Brake	Incremental A Absolute	Basic Type C0 Modbus C1 CAN Open C2 Ether CAT C3 PROFINET C4 PROFIBUS C5 Ethernet/IP C6 Other Protocol - 1 C7 Other Protocol - 2 C8 Own Protocol -1* C9 Own Protocol -2*	1 1m 3 3m 5 5m T 10m	N Without Cable (Stand.) 1 1m A 1.5m 2 2m

Note : * Based on Motor make

Customization Order no	Special Requirements
XXXX	

Example :1

Ordering no. for Rodless belt drive electric actuator 65mm size,40mm belt lead,150 mm stroke with Delta 100W servo motor mounted at the bottom side, with 3m Motor cable.

AELB065400150B-DB-3N

Example :2

Ordering no. for Rodless belt drive electric actuator 65mm size,40mm belt lead,150 mm stroke without Delta 100W servo motor mounted at the bottom side.

AELB065400150B-DB

Linear Electric Actuator

Series AELB

Cat :

Rod less Belt drive Electric Actuator - 102mm

Features

- ❑ Compact Robust Design
- ❑ Highly flexible mounting
- ❑ More Precise & positioning
- ❑ Ease of positioning
- ❑ Ease of Maintenance




Technical Specifications

Repeatability (mm)		±0.04
Motor Power (AC Servo in W)		100
Lead (mm)		32
Maximum Speed (mm)/s		1600
Maximum Payload	Horizontal (Kg)	10
	Vertical (Kg)	-
Rated Thrust (N)		61
Stroke (mm)		50-2550 mm
Belt width (mm)		15
High Rigidity Linear Guide (mm)		W20XH18
Home Sensor	Outside	EE-SX672 (NPN)

*Acceleration & deceleration value is set as 0.4 seconds


Allowable Moment

Static loading moment




Unit:mm

Horizontal Installation	A	B	C
5Kg	495	152	128
8Kg	301	91	77
10Kg	236	71	60



Unit:mm

Wall Installation	A	B	C
4Kg	162	192	625
7Kg	89	106	347
10Kg	60	71	236



Unit:Nm

MY	110
MP	110
MR	120

Note:


- The torque value in the chart indicates the center of gravity.
- Operation life is 10,000km when the product is using under the specified conditions.
- Data information is not for ceiling-mount inverse use. Contact us for the details if you want to apply ceiling- mount inverse usage

Linear Electric Actuator

Series AELB


Cat :

Motor Left side-L

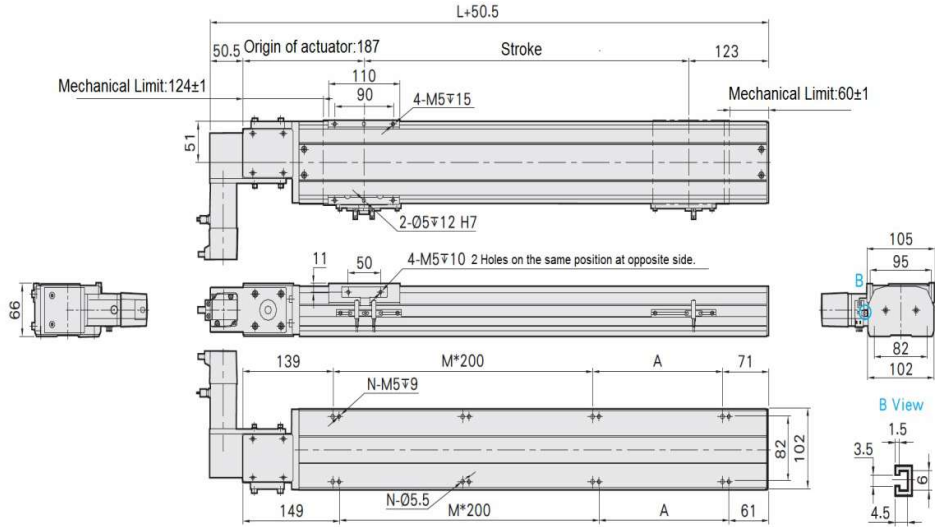

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
L	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060	1110	1160	1210	1260	1310	1360	1410	1460	1510	1560	1610
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
M	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
N	4	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16
Weight(Kg)*	6.37	6.8	7.23	7.65	8.07	8.5	8.92	9.34	9.76	10.19	10.61	11.03	11.46	11.88	12.3	12.73	13.15	13.57	13.99	14.42	14.84	15.26	15.68	16.1	16.52	16.9
Stroke	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	
L	1660	1710	1760	1810	1860	1910	1960	2010	2060	2110	2160	2210	2260	2310	2360	2410	2460	2510	2560	2610	2660	2710	2760	2810	2860	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	7	7	7	7	8	8	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	
N	18	18	18	18	20	20	20	20	22	22	22	22	24	24	24	24	24	26	26	26	26	28	28	28	28	30
Weight(Kg)*	17.36	17.78	18.2	18.62	19.04	19.46	19.88	20.3	20.72	21.14	21.56	21.98	22.4	22.82	23.24	23.66	24.08	24.5	24.92	25.34	25.76	26.18	26.6	27.02	27.44	

Motor Right Side-R

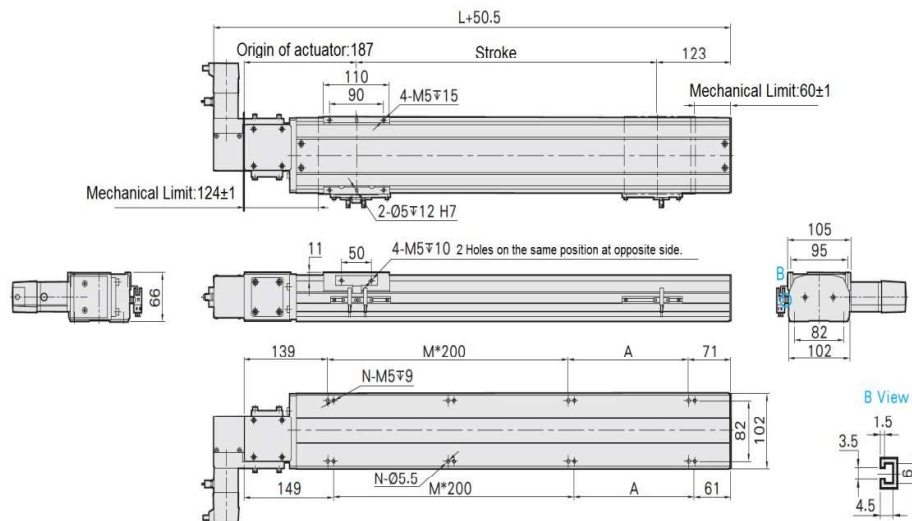


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
L	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060	1110	1160	1210	1260	1310	1360	1410	1460	1510	1560	1610
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
M	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
N	4	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16
Weight(Kg)*	6.37	6.8	7.23	7.65	8.07	8.5	8.92	9.34	9.76	10.19	10.61	11.03	11.46	11.88	12.3	12.73	13.15	13.57	13.99	14.42	14.84	15.26	15.68	16.1	16.52	16.9
Stroke	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	
L	1660	1710	1760	1810	1860	1910	1960	2010	2060	2110	2160	2210	2260	2310	2360	2410	2460	2510	2560	2610	2660	2710	2760	2810	2860	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	7	7	7	7	8	8	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	
N	18	18	18	18	20	20	20	20	22	22	22	22	24	24	24	24	24	26	26	26	26	28	28	28	28	30
Weight(Kg)*	17.36	17.78	18.2	18.62	19.04	19.46	19.88	20.3	20.72	21.14	21.56	21.98	22.4	22.82	23.24	23.66	24.08	24.5	24.92	25.34	25.76	26.18	26.6	27.02	27.44	

Linear Electric Actuator

Series AELB


Cat :

Motor Lower Left side-Q

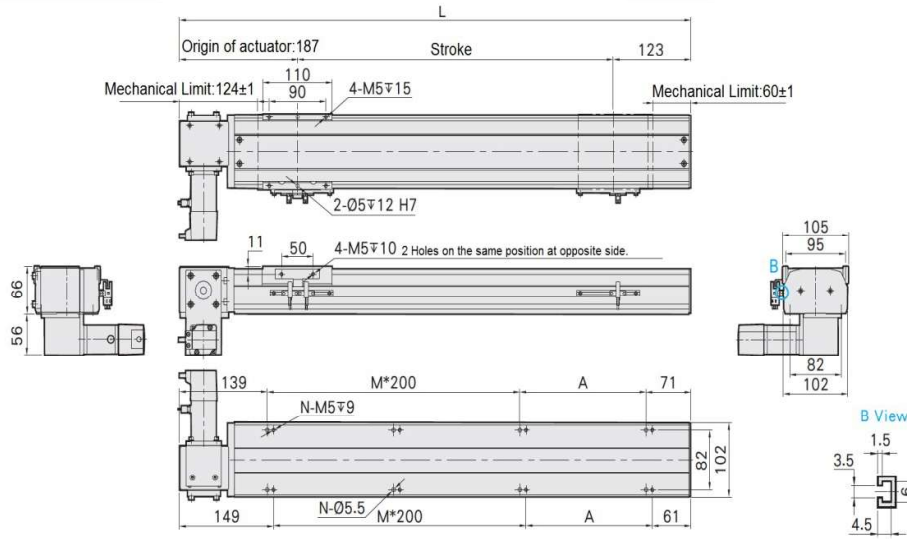

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
L	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060	1110	1160	1210	1260	1310	1360	1410	1460	1510	1560	1610
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
M	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
N	4	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	16	16	16	16	16
Weight(Kg)*	6.37	6.8	7.23	7.65	8.07	8.5	8.92	9.34	9.76	10.19	10.61	11.03	11.46	11.88	12.3	12.73	13.15	13.57	13.99	14.42	14.84	15.26	15.68	16.1	16.52	16.9
Stroke	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	
L	1660	1710	1760	1810	1860	1910	1960	2010	2060	2110	2160	2210	2260	2310	2360	2410	2460	2510	2560	2610	2660	2710	2760	2810	2860	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	7	7	7	7	8	8	8	8	8	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	
N	18	18	18	18	20	20	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	
Weight(Kg)*	17.36	17.78	18.2	18.62	19.04	19.46	19.88	20.3	20.72	21.14	21.56	21.98	22.4	22.82	23.24	23.66	24.08	24.5	24.92	25.34	25.76	26.18	26.6	27.02	27.44	

Motor Right Lower side-Y

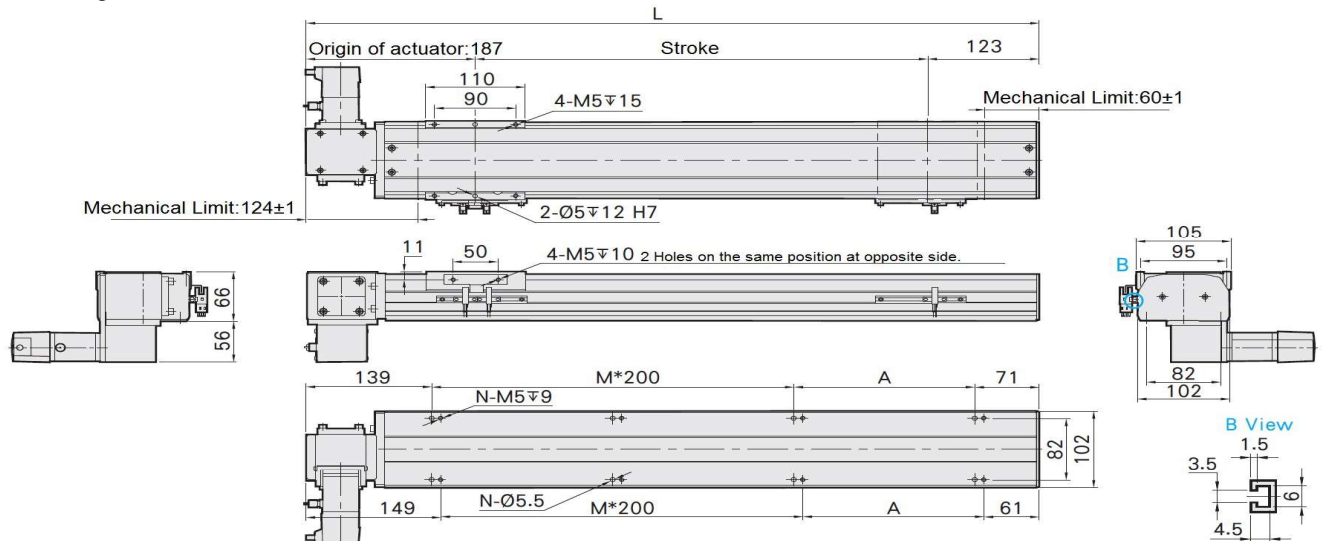


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
L	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060	1110	1160	1210	1260	1310	1360	1410	1460	1510	1560	1610
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
M	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
N	4	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	16	16	16	16	16
Weight(Kg)*	6.37	6.8	7.23	7.65	8.07	8.5	8.92	9.34	9.76	10.19	10.61	11.03	11.46	11.88	12.3	12.73	13.15	13.57	13.99	14.42	14.84	15.26	15.68	16.1	16.52	16.9
Stroke	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	
L	1660	1710	1760	1810	1860	1910	1960	2010	2060	2110	2160	2210	2260	2310	2360	2410	2460	2510	2560	2610	2660	2710	2760	2810	2860	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	7	7	7	7	8	8	8	8	8	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	
N	18	18	18	18	20	20	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	
Weight(Kg)*	17.36	17.78	18.2	18.62	19.04	19.46	19.88	20.3	20.72	21.14	21.56	21.98	22.4	22.82	23.24	23.66	24.08	24.5	24.92	25.34	25.76	26.18	26.6	27.02	27.44	

Linear Electric Actuator

Series AELB


Cat :

Motor Left Upper side-P

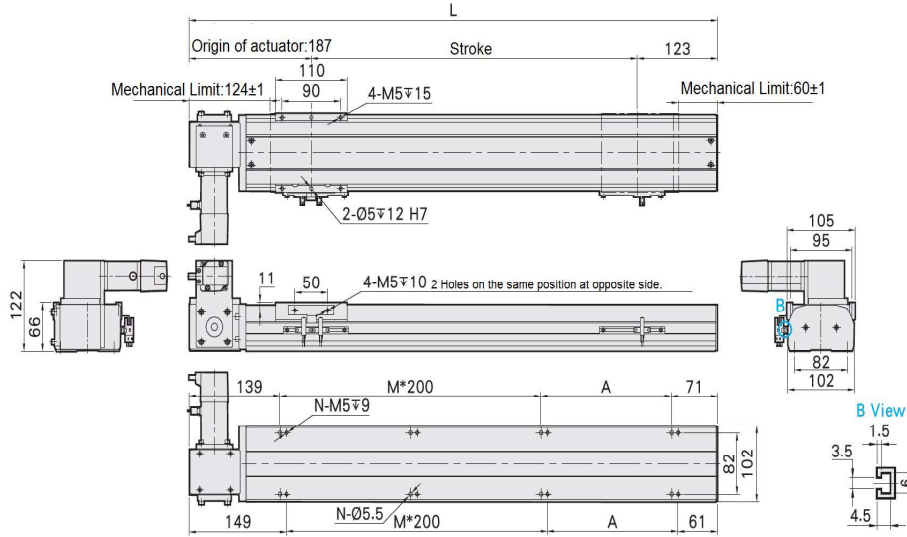

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
L	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060	1110	1160	1210	1260	1310	1360	1410	1460	1510	1560	1610
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
M	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
N	4	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16
Weight(Kg)*	6.37	6.8	7.23	7.65	8.07	8.5	8.92	9.34	9.76	10.19	10.61	11.03	11.46	11.88	12.3	12.73	13.15	13.57	13.99	14.42	14.84	15.26	15.68	16.1	16.52	16.9
Stroke	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	
L	1660	1710	1760	1810	1860	1910	1960	2010	2060	2110	2160	2210	2260	2310	2360	2410	2460	2510	2560	2610	2660	2710	2760	2810	2860	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	7	7	7	7	8	8	8	8	8	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	
N	18	18	18	18	20	20	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	
Weight(Kg)*	17.36	17.78	18.2	18.62	19.04	19.46	19.88	20.3	20.72	21.14	21.56	21.98	22.4	22.82	23.24	23.66	24.08	24.5	24.92	25.34	25.76	26.18	26.6	27.02	27.44	

Motor Right Upper side-X

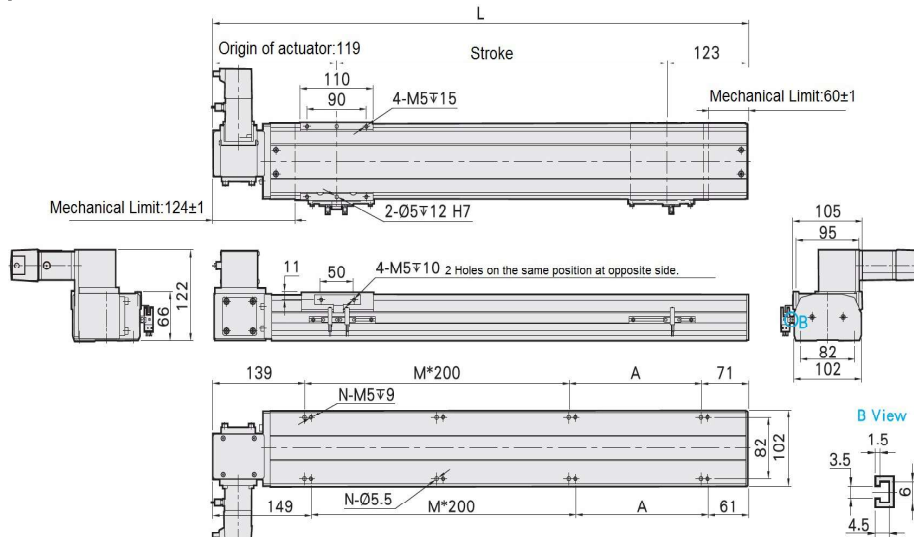

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
L	360	410	460	510	560	610	660	710	760	810	860	910	960	1010	1060	1110	1160	1210	1260	1310	1360	1410	1460	1510	1560	1610
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
M	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
N	4	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16
Weight(Kg)*	6.37	6.8	7.23	7.65	8.07	8.5	8.92	9.34	9.76	10.19	10.61	11.03	11.46	11.88	12.3	12.73	13.15	13.57	13.99	14.42	14.84	15.26	15.68	16.1	16.52	16.9
Stroke	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	
L	1660	1710	1760	1810	1860	1910	1960	2010	2060	2110	2160	2210	2260	2310	2360	2410	2460	2510	2560	2610	2660	2710	2760	2810	2860	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	7	7	7	7	8	8	8	8	8	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	
N	18	18	18	18	20	20	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	
Weight(Kg)*	17.36	17.78	18.2	18.62	19.04	19.46	19.88	20.3	20.72	21.14	21.56	21.98	22.4	22.82	23.24	23.66	24.08	24.5	24.92	25.34	25.76	26.18	26.6	27.02	27.44	

Linear Electric Actuator

Series AELB

Cat :

How to order

AELB102

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Lead</th></tr> <tr><td style="width: 10%;">32</td><td>32mm</td></tr> </table>	Lead		32	32mm	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Stroke</th></tr> <tr><td colspan="2">0050-2550mm</td></tr> </table>	Stroke		0050-2550mm		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Position</th></tr> <tr><td>L</td><td>Left Side</td></tr> <tr><td>R</td><td>Right Side</td></tr> <tr><td>P</td><td>Left Upper</td></tr> <tr><td>Q</td><td>Left Lower</td></tr> <tr><td>X</td><td>Right Upper</td></tr> <tr><td>Y</td><td>Right Lower</td></tr> </table>	Motor Position		L	Left Side	R	Right Side	P	Left Upper	Q	Left Lower	X	Right Upper	Y	Right Lower	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Specification</th></tr> <tr><th colspan="2">AC Servo</th></tr> <tr><td>D</td><td>Delta</td></tr> <tr><td>Y</td><td>Yaskawa</td></tr> <tr><td>M</td><td>Mitsubishi</td></tr> <tr><td>P</td><td>Panasonic</td></tr> <tr><td>V</td><td>INVT</td></tr> <tr><td>T</td><td>Others</td></tr> </table>	Motor Specification		AC Servo		D	Delta	Y	Yaskawa	M	Mitsubishi	P	Panasonic	V	INVT	T	Others	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Power</th></tr> <tr><th colspan="2">AC Servo</th></tr> <tr><td>B</td><td>100W</td></tr> </table>	Motor Power		AC Servo		B	100W												
Lead																																																												
32	32mm																																																											
Stroke																																																												
0050-2550mm																																																												
Motor Position																																																												
L	Left Side																																																											
R	Right Side																																																											
P	Left Upper																																																											
Q	Left Lower																																																											
X	Right Upper																																																											
Y	Right Lower																																																											
Motor Specification																																																												
AC Servo																																																												
D	Delta																																																											
Y	Yaskawa																																																											
M	Mitsubishi																																																											
P	Panasonic																																																											
V	INVT																																																											
T	Others																																																											
Motor Power																																																												
AC Servo																																																												
B	100W																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Brake</th></tr> <tr><td></td><td>Without Brake</td></tr> <tr><td>B</td><td>With Brake</td></tr> </table>	Brake			Without Brake	B	With Brake	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Encoder Type</th></tr> <tr><td></td><td>Incremental</td></tr> <tr><td>A</td><td>Absolute</td></tr> </table>	Encoder Type			Incremental	A	Absolute	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Communication Type</th></tr> <tr><td></td><td>Basic Type</td></tr> <tr><td>C0</td><td>Modbus</td></tr> <tr><td>C1</td><td>CAN Open</td></tr> <tr><td>C2</td><td>Ether CAT</td></tr> <tr><td>C3</td><td>PROFINET</td></tr> <tr><td>C4</td><td>PROFIBUS</td></tr> <tr><td>C5</td><td>Ethernet/IP</td></tr> <tr><td>C6</td><td>Other Protocol - 1</td></tr> <tr><td>C7</td><td>Other Protocol - 2</td></tr> <tr><td>C8</td><td>Own Protocol - 1*</td></tr> <tr><td>C9</td><td>Own Protocol - 2*</td></tr> </table>	Communication Type			Basic Type	C0	Modbus	C1	CAN Open	C2	Ether CAT	C3	PROFINET	C4	PROFIBUS	C5	Ethernet/IP	C6	Other Protocol - 1	C7	Other Protocol - 2	C8	Own Protocol - 1*	C9	Own Protocol - 2*	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor & Encoder Cable</th></tr> <tr><td>1</td><td>1m</td></tr> <tr><td>3</td><td>3m</td></tr> <tr><td>5</td><td>5m</td></tr> <tr><td>T</td><td>10m</td></tr> </table>	Motor & Encoder Cable		1	1m	3	3m	5	5m	T	10m	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">I/O Cable</th></tr> <tr><td>N</td><td>Without Cable (Stand.)</td></tr> <tr><td>1</td><td>1m</td></tr> <tr><td>A</td><td>1.5m</td></tr> <tr><td>2</td><td>2m</td></tr> </table>	I/O Cable		N	Without Cable (Stand.)	1	1m	A	1.5m	2	2m
Brake																																																												
	Without Brake																																																											
B	With Brake																																																											
Encoder Type																																																												
	Incremental																																																											
A	Absolute																																																											
Communication Type																																																												
	Basic Type																																																											
C0	Modbus																																																											
C1	CAN Open																																																											
C2	Ether CAT																																																											
C3	PROFINET																																																											
C4	PROFIBUS																																																											
C5	Ethernet/IP																																																											
C6	Other Protocol - 1																																																											
C7	Other Protocol - 2																																																											
C8	Own Protocol - 1*																																																											
C9	Own Protocol - 2*																																																											
Motor & Encoder Cable																																																												
1	1m																																																											
3	3m																																																											
5	5m																																																											
T	10m																																																											
I/O Cable																																																												
N	Without Cable (Stand.)																																																											
1	1m																																																											
A	1.5m																																																											
2	2m																																																											
Note : * Based on Motor make																																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Customization Order no</th></tr> <tr><td>XXXX</td><td>Special Requirements</td></tr> </table>					Customization Order no		XXXX	Special Requirements																																																				
Customization Order no																																																												
XXXX	Special Requirements																																																											

Example :1

Ordering no. for Rodless belt drive electric actuator 102mm size,32mm belt lead,150 mm stroke with Delta 100W servo motor mounted at the left side, with 3m Motor cable.

AELB102320150L-DB-3N

Example :2

Ordering no. for Rodless belt drive electric actuator 102mm size,32mm belt lead,150 mm stroke without Delta 100W servo motor mounted at the left side.

AELB102320150L-DB

Linear Electric Actuator

Series AELB

Cat :

Rod less Belt drive Electric Actuator - 135mm

Features

- Compact Robust Design
- Highly flexible mounting
- More Precise & positioning
- Ease of positioning
- Ease of Maintenance




Technical Specifications

Repeatability (mm)		±0.04
Motor Power (AC Servo in W)		200
Lead (mm)		40
Maximum Speed (mm)/s		2000
Maximum Payload	Horizontal (Kg)	25
	Vertical (Kg)	-
Rated Thrust (N)		100
Stroke (mm)		50-3050 mm
Belt width (mm)		22
High Rigidity Linear Guide (mm)		W15XH12.5
Home Sensor	Outside	EE-SX672 (NPN)


*Acceleration & deceleration value is set as 0.4 seconds

Allowable Moment



Unit:mm


Horizontal Installation	A	B	C
10Kg	1794	688	538
20Kg	858	324	253
25kg	670	251	197



Unit:mm

Wall Installation	A	B	C
15Kg	348	446	1170
18Kg	285	365	961
25kg	197	251	670

Static loading moment



Unit:Nm

MY	551
MP	552
MR	485

Note:


- The torque value in the chart indicates the center of gravity.
- Operation life is 10,000km when the product is using under the specified conditions.
- Data information is not for ceiling-mount inverse use. Contact us for the details if you want to apply ceiling- mount inverse usage

Linear Electric Actuator

Series AELB


Cat :

Motor Left side-L

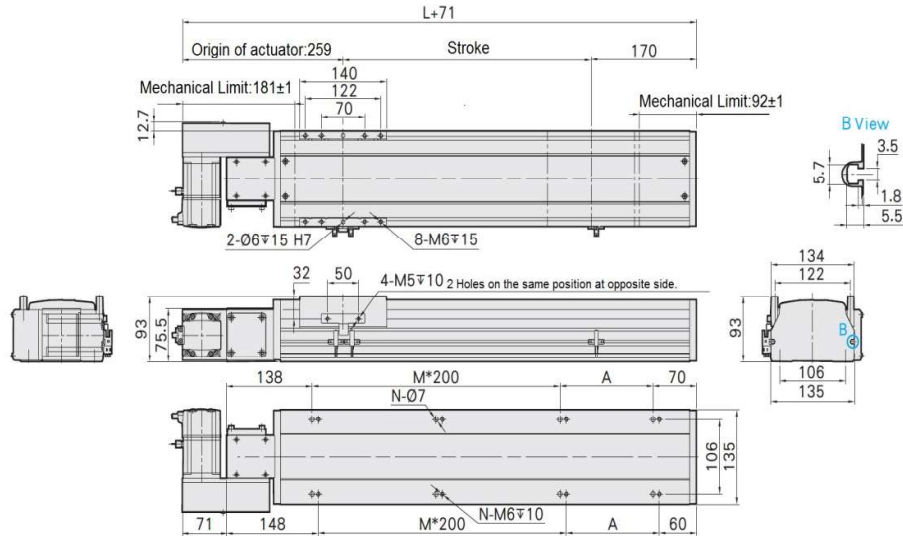

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	408	458	508	558	608	658	708	758	808	858	908	958	1008	1050	1108	1158	1208	1258	1308	1358	1408	1458	1508	1558	1608	1658	1708	1758	1808	1858	1908
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20
Weight(Kg)*	8.2	8.6	9	9.5	10	10.5	11	11.4	12	12.4	13	13.4	13.9	14.4	14.9	15.4	15.9	16.4	16.9	17.3	17.9	18.5	19.1	19.7	20.3	20.9	21.5	22.1	22.7	23.3	23.9
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1958	2008	2058	2108	2158	2208	2258	2308	2358	2408	2458	2508	2558	2608	2658	2708	2758	2808	2858	2908	2958	3008	3058	3108	3158	3208	3258	3308	3358	3408	
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	
M	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	
N	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	
Weight(Kg)*	24.5	25.1	25.7	26.3	26.9	27.5	28.1	28.7	29.3	29.9	30.5	31.1	31.7	32.3	32.9	33.5	34.1	34.7	35.3	35.9	36.5	37.1	37.7	38.3	38.9	39.5	40.1	40.7	41.3	41.9	

Motor Right Side-R

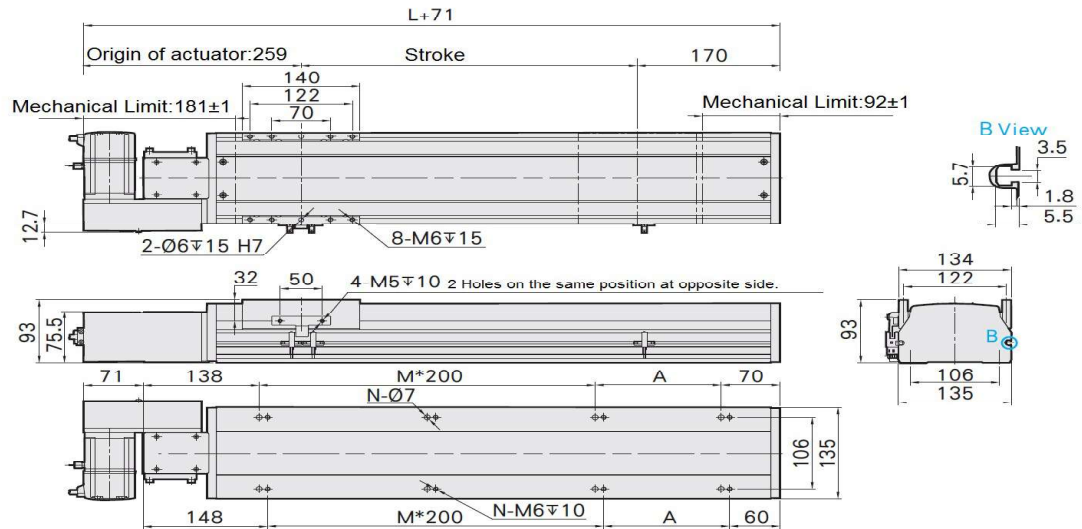


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	408	458	508	558	608	658	708	758	808	858	908	958	1008	1050	1108	1158	1208	1258	1308	1358	1408	1458	1508	1558	1608	1658	1708	1758	1808	1858	1908
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20
Weight(Kg)*	8.2	8.6	9	9.5	10	10.5	11	11.4	12	12.4	13	13.4	13.9	14.4	14.9	15.4	15.9	16.4	16.9	17.3	17.9	18.5	19.1	19.7	20.3	20.9	21.5	22.1	22.7	23.3	23.9
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1958	2008	2058	2108	2158	2208	2258	2308	2358	2408	2458	2508	2558	2608	2658	2708	2758	2808	2858	2908	2958	3008	3058	3108	3158	3208	3258	3308	3358	3408	
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	
M	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	
N	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	
Weight(Kg)*	24.5	25.1	25.7	26.3	26.9	27.5	28.1	28.7	29.3	29.9	30.5	31.1	31.7	32.3	32.9	33.5	34.1	34.7	35.3	35.9	36.5	37.1	37.7	38.3	38.9	39.5	40.1	40.7	41.3	41.9	

Linear Electric Actuator

Series AELB


Cat :

Motor Left Lower side-Q

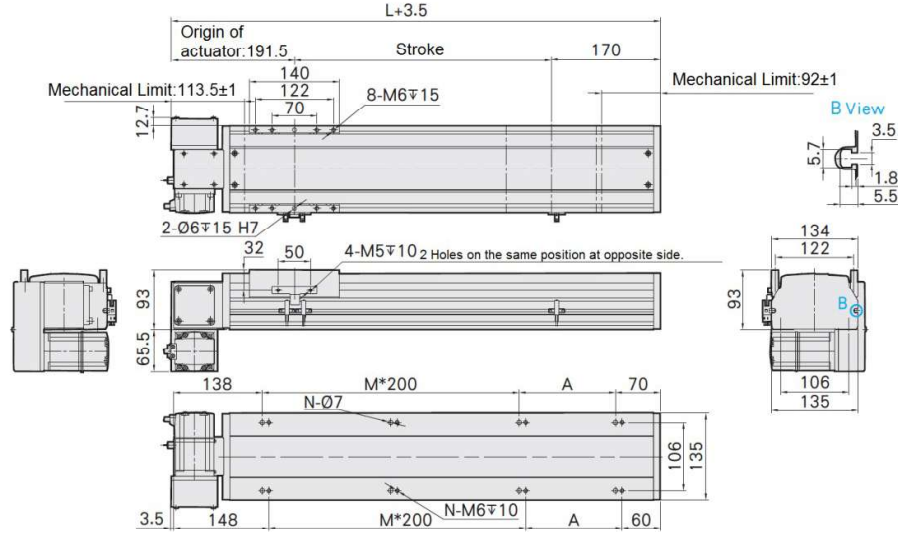

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	408	458	508	558	608	658	708	758	808	858	908	958	1008	1050	1108	1158	1208	1258	1308	1358	1408	1458	1508	1558	1608	1658	1708	1758	1808	1858	1908
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	5	5	5	5	5	6	6	6	7	7	7	7	8	8	
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	14	16	16	16	16	18	18	18	18	20	20
Weight(Kg)*	8.2	8.6	9	9.5	10	10.5	11	11.4	12	12.4	13	13.4	13.9	14.4	14.9	15.4	15.9	16.4	16.9	17.3	17.9	18.5	19.1	19.7	20.3	20.9	21.5	22.1	22.7	23.3	23.9
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1958	2008	2058	2108	2158	2208	2258	2308	2358	2408	2458	2508	2558	2608	2658	2708	2758	2808	2858	2908	2958	3008	3058	3108	3158	3208	3258	3308	3358	3408	
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	
M	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	15	
N	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	
Weight(Kg)*	24.5	25.1	25.7	26.3	26.9	27.5	28.1	28.7	29.3	29.9	30.5	31.1	31.7	32.3	32.9	33.5	34.1	34.7	35.3	35.9	36.5	37.1	37.7	38.3	38.9	39.5	40.1	40.7	41.3	41.9	

Motor Right Lower side-Y

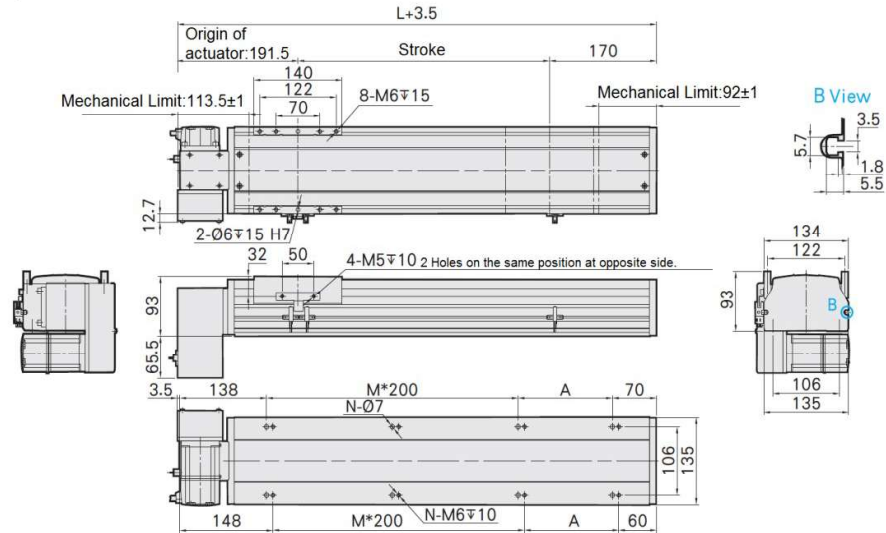


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	408	458	508	558	608	658	708	758	808	858	908	958	1008	1050	1108	1158	1208	1258	1308	1358	1408	1458	1508	1558	1608	1658	1708	1758	1808	1858	1908
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	14	16	16	16	16	18	18	18	18	20	20
Weight(Kg)*	8.2	8.6	9	9.5	10	10.5	11	11.4	12	12.4	13	13.4	13.9	14.4	14.9	15.4	15.9	16.4	16.9	17.3	17.9	18.5	19.1	19.7	20.3	20.9	21.5	22.1	22.7	23.3	23.9
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1958	2008	2058	2108	2158	2208	2258	2308	2358	2408	2458	2508	2558	2608	2658	2708	2758	2808	2858	2908	2958	3008	3058	3108	3158	3208	3258	3308	3358	3408	
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	
M	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	
N	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	
Weight(Kg)*	24.5	25.1	25.7	26.3	26.9	27.5	28.1	28.7	29.3	29.9	30.5	31.1	31.7	32.3	32.9	33.5	34.1	34.7	35.3	35.9	36.5	37.1	37.7	38.3	38.9	39.5	40.1	40.7	41.3	41.9	

Linear Electric Actuator

Series AELB


Cat :

Motor Left Upper side-P

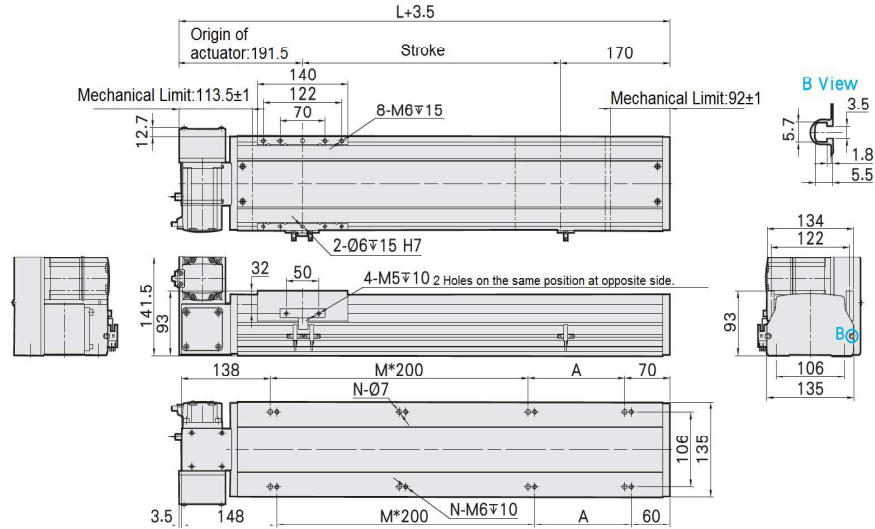

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	408	458	508	558	608	658	708	758	808	858	908	958	1008	1050	1108	1158	1208	1258	1308	1358	1408	1458	1508	1558	1608	1658	1708	1758	1808	1858	1908
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	5	5	5	5	5	6	6	6	6	7	7	7	7	8	8
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	14	16	16	16	16	18	18	18	18	20	20
Weight(Kg)*	8.2	8.6	9	9.5	10	10.5	11	11.4	12	12.4	13	13.4	13.9	14.4	14.9	15.4	15.9	16.4	16.9	17.3	17.9	18.5	19.1	19.7	20.3	20.9	21.5	22.1	22.7	23.3	23.9
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1958	2008	2058	2108	2158	2208	2258	2308	2358	2408	2458	2508	2558	2608	2658	2708	2758	2808	2858	2908	2958	3008	3058	3108	3158	3208	3258	3308	3358	3408	
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	
M	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	13	13	13	13	13	14	14	14	14	15	15	15	15	
N	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	
Weight(Kg)*	24.5	25.1	25.7	26.3	26.9	27.5	28.1	28.7	29.3	29.9	30.5	31.1	31.7	32.3	32.9	33.5	34.1	34.7	35.3	35.9	36.5	37.1	37.7	38.3	38.9	39.5	40.1	40.7	41.3	41.9	

Motor Right Upper side-X

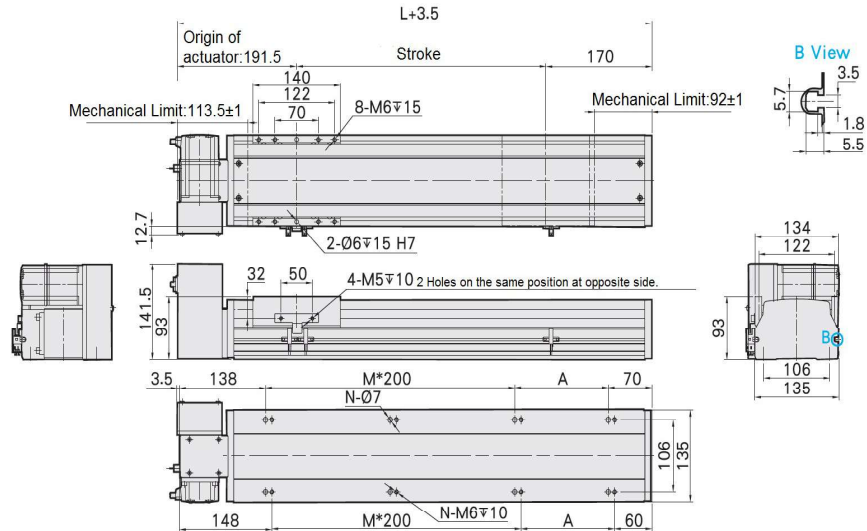

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	408	458	508	558	608	658	708	758	808	858	908	958	1008	1050	1108	1158	1208	1258	1308	1358	1408	1458	1508	1558	1608	1658	1708	1758	1808	1858	1908
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	14	16	16	16	16	18	18	18	18	20	20
Weight(Kg)*	8.2	8.6	9	9.5	10	10.5	11	11.4	12	12.4	13	13.4	13.9	14.4	14.9	15.4	15.9	16.4	16.9	17.3	17.9	18.5	19.1	19.7	20.3	20.9	21.5	22.1	22.7	23.3	23.9
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1958	2008	2058	2108	2158	2208	2258	2308	2358	2408	2458	2508	2558	2608	2658	2708	2758	2808	2858	2908	2958	3008	3058	3108	3158	3208	3258	3308	3358	3408	
A	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	
M	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	
N	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	
Weight(Kg)*	24.5	25.1	25.7	26.3	26.9	27.5	28.1	28.7	29.3	29.9	30.5	31.1	31.7	32.3	32.9	33.5	34.1	34.7	35.3	35.9	36.5	37.1	37.7	38.3	38.9	39.5	40.1	40.7	41.3	41.9	

Linear Electric Actuator

Series AELB

Cat :

How to order:

AELB135

	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Lead</th></tr> <tr><td>40</td><td>40mm</td></tr> </table>	Lead		40	40mm	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Stroke</th></tr> <tr><td colspan="2">0050-3050mm</td></tr> </table>	Stroke		0050-3050mm		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Position</th></tr> <tr><td>L</td><td>Left Side</td></tr> <tr><td>R</td><td>Right Side</td></tr> <tr><td>P</td><td>Left Upper</td></tr> <tr><td>Q</td><td>Left Lower</td></tr> <tr><td>X</td><td>Right Upper</td></tr> <tr><td>Y</td><td>Right Lower</td></tr> </table>	Motor Position		L	Left Side	R	Right Side	P	Left Upper	Q	Left Lower	X	Right Upper	Y	Right Lower	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Specification</th></tr> <tr><th colspan="2">AC Servo</th></tr> <tr><td>D</td><td>Delta</td></tr> <tr><td>Y</td><td>Yaskawa</td></tr> <tr><td>M</td><td>Mitsubishi</td></tr> <tr><td>P</td><td>Panasonic</td></tr> <tr><td>V</td><td>INVT</td></tr> <tr><td>T</td><td>Others</td></tr> </table>	Motor Specification		AC Servo		D	Delta	Y	Yaskawa	M	Mitsubishi	P	Panasonic	V	INVT	T	Others	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Power</th></tr> <tr><th colspan="2">AC Servo</th></tr> <tr><td>C</td><td>200W</td></tr> </table>	Motor Power		AC Servo		C	200W											
Lead																																																												
40	40mm																																																											
Stroke																																																												
0050-3050mm																																																												
Motor Position																																																												
L	Left Side																																																											
R	Right Side																																																											
P	Left Upper																																																											
Q	Left Lower																																																											
X	Right Upper																																																											
Y	Right Lower																																																											
Motor Specification																																																												
AC Servo																																																												
D	Delta																																																											
Y	Yaskawa																																																											
M	Mitsubishi																																																											
P	Panasonic																																																											
V	INVT																																																											
T	Others																																																											
Motor Power																																																												
AC Servo																																																												
C	200W																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Brake</th></tr> <tr><td></td><td>Without Brake</td></tr> <tr><td>B</td><td>With Brake</td></tr> </table>	Brake			Without Brake	B	With Brake	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Encoder Type</th></tr> <tr><td></td><td>Incremental</td></tr> <tr><td>A</td><td>Absolute</td></tr> </table>	Encoder Type			Incremental	A	Absolute	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Communication Type</th></tr> <tr><td></td><td>Basic Type</td></tr> <tr><td>C0</td><td>Modbus</td></tr> <tr><td>C1</td><td>CAN Open</td></tr> <tr><td>C2</td><td>Ether CAT</td></tr> <tr><td>C3</td><td>PROFINET</td></tr> <tr><td>C4</td><td>PROFIBUS</td></tr> <tr><td>C5</td><td>Ethernet/IP</td></tr> <tr><td>C6</td><td>Other Protocol - 1</td></tr> <tr><td>C7</td><td>Other Protocol - 2</td></tr> <tr><td>C8</td><td>Own Protocol -1*</td></tr> <tr><td>C9</td><td>Own Protocol -2*</td></tr> </table>	Communication Type			Basic Type	C0	Modbus	C1	CAN Open	C2	Ether CAT	C3	PROFINET	C4	PROFIBUS	C5	Ethernet/IP	C6	Other Protocol - 1	C7	Other Protocol - 2	C8	Own Protocol -1*	C9	Own Protocol -2*	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor & Encoder Cable</th></tr> <tr><td>1</td><td>1m</td></tr> <tr><td>3</td><td>3m</td></tr> <tr><td>5</td><td>5m</td></tr> <tr><td>T</td><td>10m</td></tr> </table>	Motor & Encoder Cable		1	1m	3	3m	5	5m	T	10m	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">I/O Cable</th></tr> <tr><td>N</td><td>Without Cable (Stand.)</td></tr> <tr><td>1</td><td>1m</td></tr> <tr><td>A</td><td>1.5m</td></tr> <tr><td>2</td><td>2m</td></tr> </table>	I/O Cable		N	Without Cable (Stand.)	1	1m	A	1.5m	2	2m
Brake																																																												
	Without Brake																																																											
B	With Brake																																																											
Encoder Type																																																												
	Incremental																																																											
A	Absolute																																																											
Communication Type																																																												
	Basic Type																																																											
C0	Modbus																																																											
C1	CAN Open																																																											
C2	Ether CAT																																																											
C3	PROFINET																																																											
C4	PROFIBUS																																																											
C5	Ethernet/IP																																																											
C6	Other Protocol - 1																																																											
C7	Other Protocol - 2																																																											
C8	Own Protocol -1*																																																											
C9	Own Protocol -2*																																																											
Motor & Encoder Cable																																																												
1	1m																																																											
3	3m																																																											
5	5m																																																											
T	10m																																																											
I/O Cable																																																												
N	Without Cable (Stand.)																																																											
1	1m																																																											
A	1.5m																																																											
2	2m																																																											
<div style="border: 1px solid black; display: inline-block; padding: 2px;"> Note : * Based on Motor make </div>																																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Customization Order no</th></tr> <tr><td>XXXX</td><td>Special Requirements</td></tr> </table>						Customization Order no		XXXX	Special Requirements																																																			
Customization Order no																																																												
XXXX	Special Requirements																																																											

Example :1

Ordering no. for Rodless belt drive electric actuator 135mm size,40mm belt lead,150 mm stroke with Delta 200W servo motor mounted at the left side, with 3m Motor cable.

AELB135400150L-DC-3N

Example :2

Ordering no. for Rodless belt drive electric actuator 135mm size,40mm belt lead,150 mm stroke without Delta 200W servo motor mounted at the left side.

AELB135400150L-DC

Linear Electric Actuator

Series AELB

Cat :

Rod less Belt drive Electric Actuator - 170mm

Features

- Compact Robust Design
- Highly flexible mounting
- More Precise & positioning
- Ease of positioning
- Ease of Maintenance




Technical Specifications

Repeatability (mm)		±0.04
Motor Power (AC Servo in W)		400
Lead (mm)		40
Maximum Speed (mm/s)		2000
Maximum Payload	Horizontal (Kg)	40
	Vertical (Kg)	-
Rated Thrust (N)		204
Stroke (mm)		50-3050 mm
Belt width (mm)		30
High Rigidity Linear Guide (mm)		W20XH15
Home Sensor	Outside	EE-SX672 (NPN)


*Acceleration & deceleration value is set as 0.4 seconds

Allowable Moment



Unit:mm


Horizontal Installation	A	B	C
10Kg	2942	1133	1033
20Kg	1430	547	498
30Kg	926	350	320
45Kg	588	219	201



Unit:mm

Wall Installation	A	B	C
15Kg	676	742	1933
25Kg	390	428	1127
35Kg	269	294	781
45Kg	201	219	588

Static loading moment



Unit:Nm

MY	1032
MP	1034
MR	908

Note:


- The torque value in the chart indicates the center of gravity.
- Operation life is 10,000km when the product is using under the specified conditions.
- Data information is not for ceiling-mount inverse use. Contact us for the details if you want to apply ceiling- mount inverse usage

Linear Electric Actuator

Series AELB


Cat :

Motor Left side-L

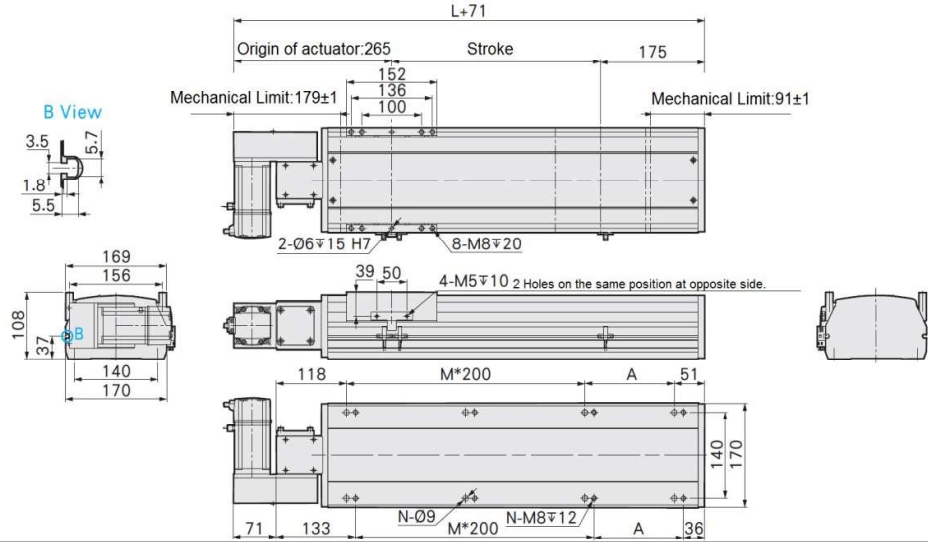

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	419	469	519	569	619	669	719	769	819	869	919	969	1019	1069	1119	1169	1219	1269	1319	1369	1419	1469	1519	1569	1619	1669	1719	1769	1819	1869	1919
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	10.2	12	13.8	14.6	15.4	16.1	16.9	17.7	18.5	19.2	20	20.8	21.6	22.3	23.1	23.9	24.7	25.4	26.2	27	27.8	28.6	29.4	30.2	31	31.8	32.6	33.4	34.2	35	35.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1969	2019	2069	2119	2169	2219	2269	2319	2369	2419	2469	2519	2569	2619	2669	2719	2769	2819	2869	2919	2969	3019	3069	3119	3169	3219	3269	3319	3369	3419	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	
Weight(Kg)*	36.6	37.4	38.2	39	39.8	40.6	41.4	42.2	43	43.8	44.6	45.4	46.2	47	47.8	48.8	49.4	50.2	51	51.8	52.8	53.4	54.2	55	55.8	56.8	57.4	58.2	59	59.8	

Motor Right Side-R

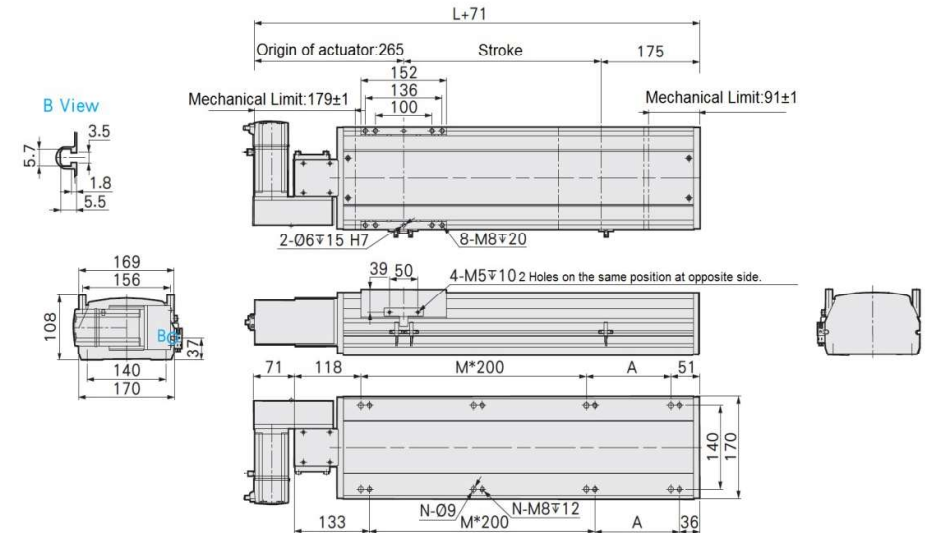


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	419	469	519	569	619	669	719	769	819	869	919	969	1019	1069	1119	1169	1219	1269	1319	1369	1419	1469	1519	1569	1619	1669	1719	1769	1819	1869	1919
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	10.2	12	13.8	14.6	15.4	16.1	16.9	17.7	18.5	19.2	20	20.8	21.6	22.3	23.1	23.9	24.7	25.4	26.2	27	27.8	28.6	29.4	30.2	31	31.8	32.6	33.4	34.2	35	35.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1969	2019	2069	2119	2169	2219	2269	2319	2369	2419	2469	2519	2569	2619	2669	2719	2769	2819	2869	2919	2969	3019	3069	3119	3169	3219	3269	3319	3369	3419	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	
Weight(Kg)*	36.6	37.4	38.2	39	39.8	40.6	41.4	42.2	43	43.8	44.6	45.4	46.2	47	47.8	48.8	49.4	50.2	51	51.8	52.8	53.4	54.2	55	55.8	56.8	57.4	58.2	59	59.8	

Linear Electric Actuator

Series AELB


Cat :

Motor Left Lower side-Q

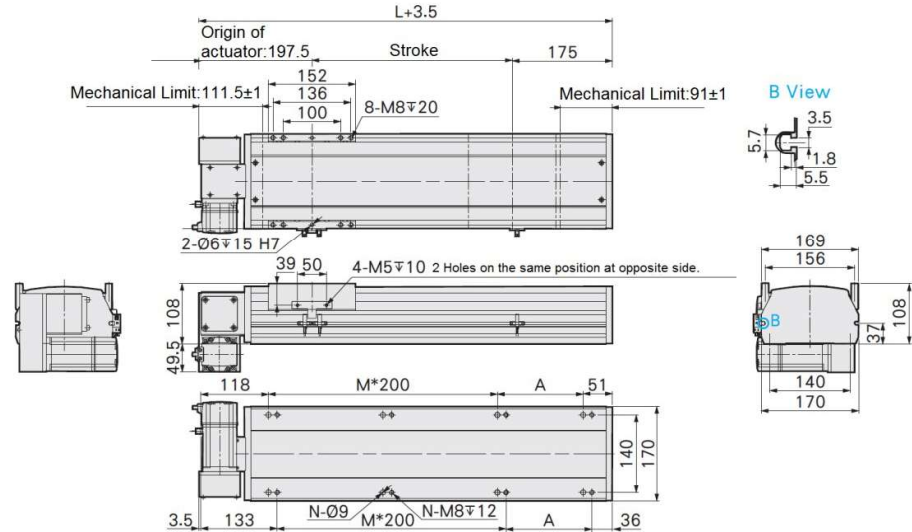

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	
L	419	469	519	569	619	669	719	769	819	869	919	969	1019	1069	1119	1169	1219	1269	1319	1369	1419	1469	1519	1569	1619	1669	1719	1769	1819	1869	1919	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	10.2	12	13.8	14.6	15.4	16.1	16.9	17.7	18.5	19.2	20	20.8	21.6	22.3	23.1	23.9	24.7	25.4	26.2	27	27.8	28.6	29.4	30.2	31	31.8	32.6	33.4	34.2	35	35.8	
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050		
L	1969	2019	2069	2119	2169	2219	2269	2319	2369	2419	2469	2519	2569	2619	2669	2719	2769	2819	2869	2919	2969	3019	3069	3119	3169	3219	3269	3319	3369	3419		
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50		
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16		
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36		
Weight(Kg)*	36.6	37.4	38.2	39	39.8	40.6	41.4	42.2	43	43.8	44.6	45.4	46.2	47	47.8	48.8	49.4	50.2	51	51.8	52.8	53.4	54.2	55	55.8	56.8	57.4	58.2	59	59.8		

Motor Right Lower side-Y

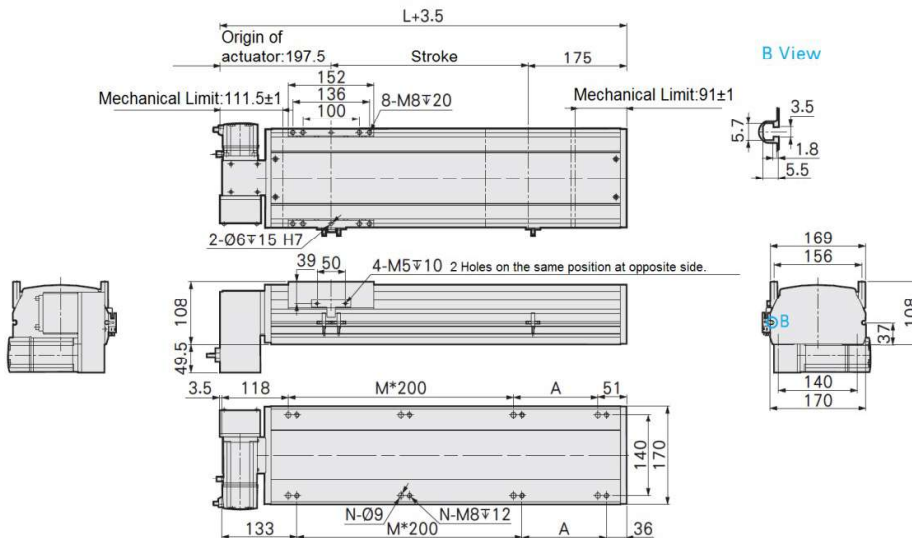


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	
L	419	469	519	569	619	669	719	769	819	869	919	969	1019	1069	1119	1169	1219	1269	1319	1369	1419	1469	1519	1569	1619	1669	1719	1769	1819	1869	1919	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	10.2	12	13.8	14.6	15.4	16.1	16.9	17.7	18.5	19.2	20	20.8	21.6	22.3	23.1	23.9	24.7	25.4	26.2	27	27.8	28.6	29.4	30.2	31	31.8	32.6	33.4	34.2	35	35.8	
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050		
L	1969	2019	2069	2119	2169	2219	2269	2319	2369	2419	2469	2519	2569	2619	2669	2719	2769	2819	2869	2919	2969	3019	3069	3119	3169	3219	3269	3319	3369	3419		
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50		
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16		
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36		
Weight(Kg)*	36.6	37.4	38.2	39	39.8	40.6	41.4	42.2	43	43.8	44.6	45.4	46.2	47	47.8	48.8	49.4	50.2	51	51.8	52.8	53.4	54.2	55	55.8	56.8	57.4	58.2	59	59.8		

Linear Electric Actuator

Series AELB


Cat :

Motor Left Upper side-P

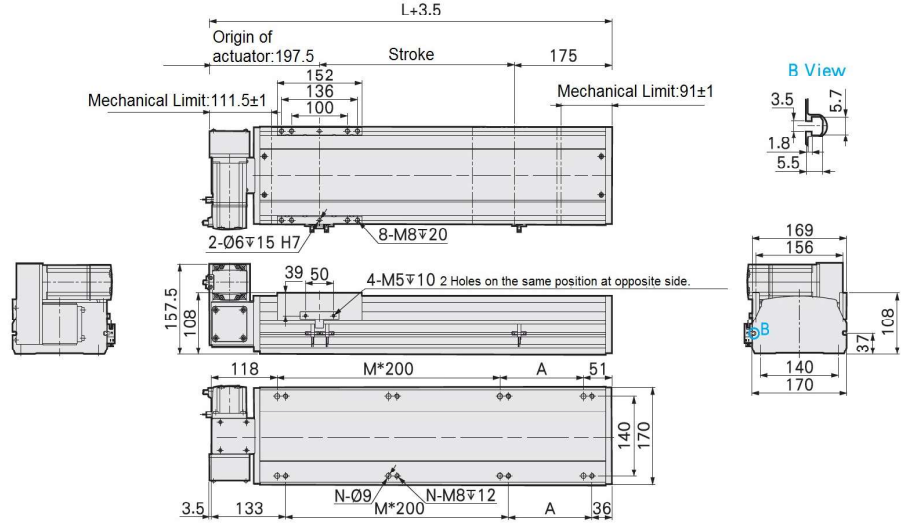

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	419	469	519	569	619	669	719	769	819	869	919	969	1019	1069	1119	1169	1219	1269	1319	1369	1419	1469	1519	1569	1619	1669	1719	1769	1819	1869	1919
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	6	6	6	6	7	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	10.2	12	13.8	14.6	15.4	16.1	16.9	17.7	18.5	19.2	20	20.8	21.6	22.3	23.1	23.9	24.7	25.4	26.2	27	27.8	28.6	29.4	30.2	31	31.8	32.6	33.4	34.2	35	35.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1969	2019	2069	2119	2169	2219	2269	2319	2369	2419	2469	2519	2569	2619	2669	2719	2769	2819	2869	2919	2969	3019	3069	3119	3169	3219	3269	3319	3369	3419	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	
Weight(Kg)*	36.6	37.4	38.2	39	39.8	40.6	41.4	42.2	43	43.8	44.6	45.4	46.2	47	47.8	48.8	49.4	50.2	51	51.8	52.8	53.4	54.2	55	55.8	56.8	57.4	58.2	59	59.8	

Motor Right Upper side-X

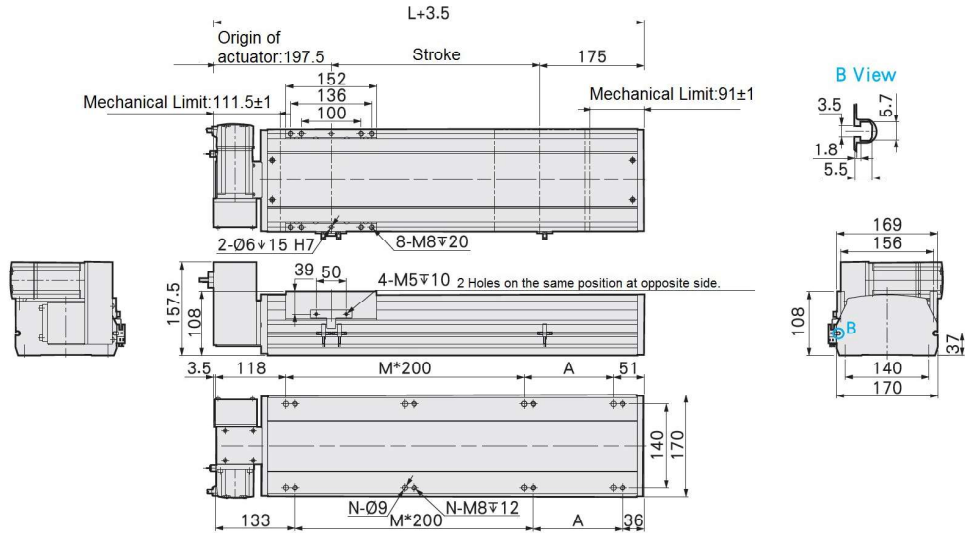

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	419	469	519	569	619	669	719	769	819	869	919	969	1019	1069	1119	1169	1219	1269	1319	1369	1419	1469	1519	1569	1619	1669	1719	1769	1819	1869	1919
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	6	6	6	6	7	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	10.2	12	13.8	14.6	15.4	16.1	16.9	17.7	18.5	19.2	20	20.8	21.6	22.3	23.1	23.9	24.7	25.4	26.2	27	27.8	28.6	29.4	30.2	31	31.8	32.6	33.4	34.2	35	35.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	1969	2019	2069	2119	2169	2219	2269	2319	2369	2419	2469	2519	2569	2619	2669	2719	2769	2819	2869	2919	2969	3019	3069	3119	3169	3219	3269	3319	3369	3419	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	
Weight(Kg)*	36.6	37.4	38.2	39	39.8	40.6	41.4	42.2	43	43.8	44.6	45.4	46.2	47	47.8	48.8	49.4	50.2	51	51.8	52.8	53.4	54.2	55	55.8	56.8	57.4	58.2	59	59.8	

Linear Electric Actuator

Series AELB

Cat :

How to order

AELB170

	Lead	Stroke	Motor Position	Motor Specification	Motor Power
	40 40mm	0050-3050mm	L Left Side R Right Side P Left Upper Q Left Lower X Right Upper Y Right Lower	AC Servo D Delta Y Yaskawa M Mitsubishi P Panasonic V INVT T Others	AC Servo D 400W
	Brake	Encoder Type	Communication Type	Motor & Encoder Cable	I/O Cable
	Without Brake B With Brake	Incremental A Absolute	Basic Type C0 Modbus C1 CAN Open C2 Ether CAT C3 PROFINET C4 PROFIBUS C5 Ethernet/IP C6 Other Protocol - 1 C7 Other Protocol - 2 C8 Own Protocol -1* C9 Own Protocol -2*	1 1m 3 3m 5 5m T 10m	N Without Cable (Stand.) 1 1m A 1.5m 2 2m

Note : * Based on Motor make

	Customization Order no
XXXX	Special Requirements

Example :1

Ordering no. for Rodless belt drive electric actuator 170mm size,40mm belt lead,150 mm stroke with Delta 400W servo motor mounted at the left side, with 3m Motor cable.

AELB170400150L-DD-3N

Example :2

Ordering no. for Rodless belt drive electric actuator 170mm size,40mm belt lead,150 mm stroke without Delta 400W servo motor mounted at the left side.

AELB170400150L-DD

Linear Electric Actuator

Series AELB

Cat :

Rod less Belt drive Electric Actuator - 220mm

Features

- ❑ Compact Robust Design
- ❑ Highly flexible mounting
- ❑ More Precise & positioning
- ❑ Ease of positioning
- ❑ Ease of Maintenance




Technical Specifications

Repeatability (mm)		±0.04
Motor Power (AC Servo in W)		750
Lead (mm)		40
Maximum Speed (mm/s)		2000
Maximum Payload	Horizontal (Kg)	85
	Vertical (Kg)	-
Rated Thrust (N)		367
Stroke (mm)		50-3500 mm
Belt width (mm)		50
High Rigidity Linear Guide (mm)		W23XH18
Home Sensor	Outside	EE-SX672 (NPN)


*Acceleration & deceleration value is set as 0.4 seconds

Allowable Moment


Static loading moment



Unit:mm



Unit:mm



Unit:Nm

Horizontal Installation	A	B	C
45Kg	1588	600	349
65Kg	1052	328	285
85Kg	768	281	206

Wall Installation	A	B	C
40Kg	500	685	1805
60Kg	315	430	1152
85Kg	206	281	768

MY	2052
MP	2052
MR	1810

Note:


- The torque value in the chart indicates the center of gravity.
- Operation life is 10,000km when the product is using under the specified conditions.
- Data information is not for ceiling-mount inverse use. Contact us for the details if you want to apply ceiling- mount inverse usage

Linear Electric Actuator

Series AELB


Cat :

Motor Left side-L

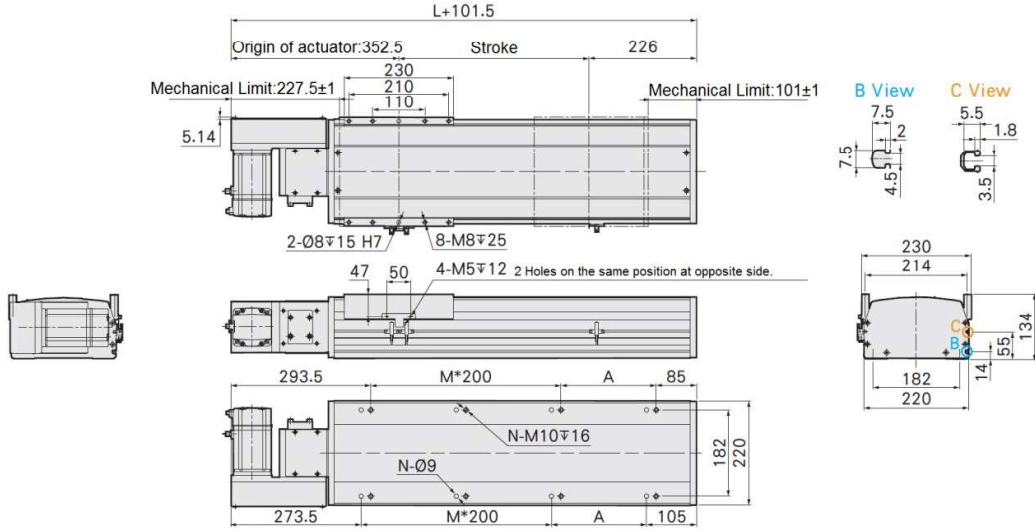

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	527	577	627	677	727	777	827	877	927	977	1027	1077	1127	1177	1227	1277	1327	1377	1427	1477	1527	1577	1627	1677	1727	1777	1827	1877	1927	1977	2027
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	5	5	5	5	5	6	6	6	7	7	7	7	8	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	28.8	30	31.2	32.4	33.6	34.8	36	37.2	38.4	39.6	40.8	42	43.2	44.4	45.6	46.8	48	49.2	50.4	51.6	52.8	54	55.2	56.4	57.6	58.8	60	61.2	62.4	63.6	64.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	2077	2127	2177	2227	2277	2327	2377	2427	2477	2527	2577	2627	2677	2727	2777	2827	2877	2927	2977	3027	3077	3127	3177	3227	3277	3327	3377	3427	3477	3527	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	
Weight(Kg)*	66	67.2	68.4	69.6	70.8	72	73.2	74.4	75.6	76.8	78	79.2	80.4	81.6	82.8	84	85.2	86.4	87.6	88.8	90	91.2	92.4	93.6	94.8	96	97.2	98.4	99.6	101	

Motor Right Side-R

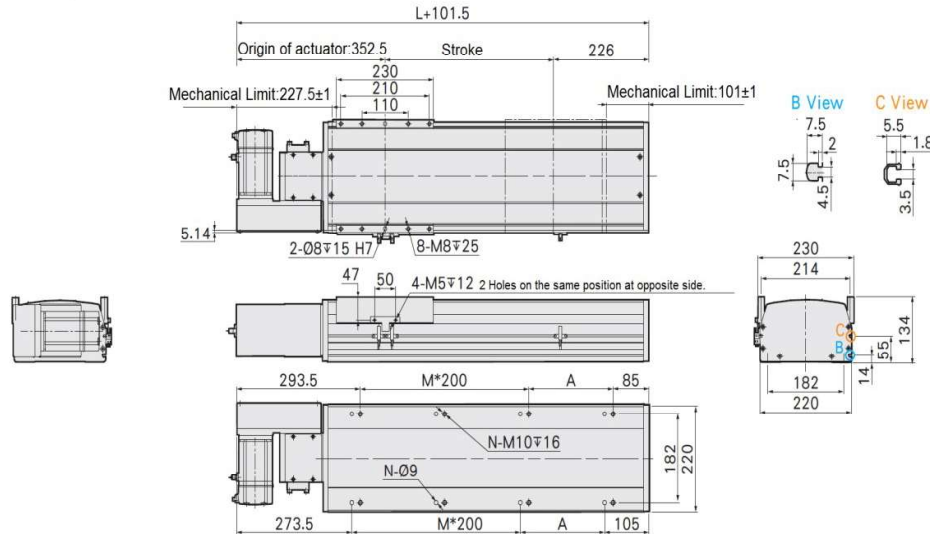


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	527	577	627	677	727	777	827	877	927	977	1027	1077	1127	1177	1227	1277	1327	1377	1427	1477	1527	1577	1627	1677	1727	1777	1827	1877	1927	1977	2027
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	5	5	5	5	5	6	6	6	7	7	7	7	8	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	28.8	30	31.2	32.4	33.6	34.8	36	37.2	38.4	39.6	40.8	42	43.2	44.4	45.6	46.8	48	49.2	50.4	51.6	52.8	54	55.2	56.4	57.6	58.8	60	61.2	62.4	63.6	64.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	2077	2127	2177	2227	2277	2327	2377	2427	2477	2527	2577	2627	2677	2727	2777	2827	2877	2927	2977	3027	3077	3127	3177	3227	3277	3327	3377	3427	3477	3527	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	
Weight(Kg)*	66	67.2	68.4	69.6	70.8	72	73.2	74.4	75.6	76.8	78	79.2	80.4	81.6	82.8	84	85.2	86.4	87.6	88.8	90	91.2	92.4	93.6	94.8	96	97.2	98.4	99.6	101	

Linear Electric Actuator

Series AELB


Cat :

Motor Left Lower side-Q

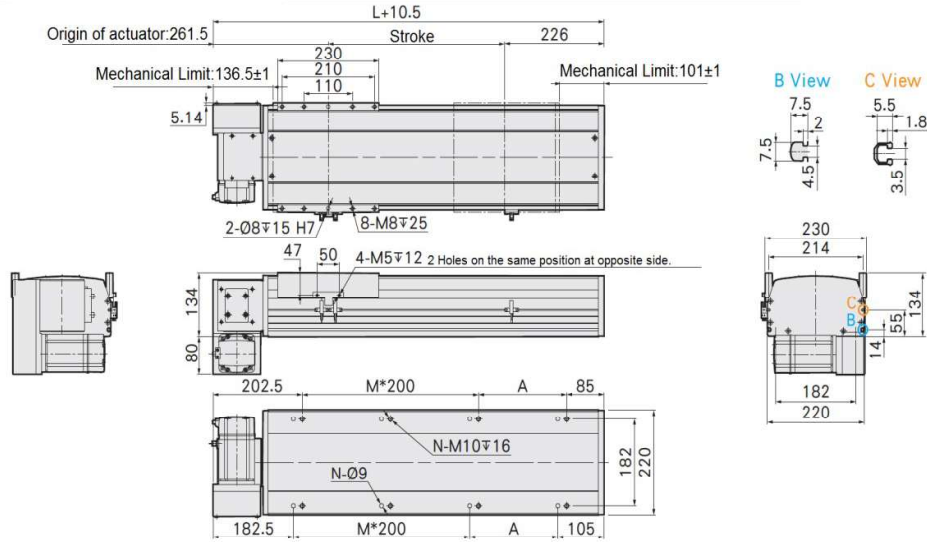

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	527	577	627	677	727	777	827	877	927	977	1027	1077	1127	1177	1227	1277	1327	1377	1427	1477	1527	1577	1627	1677	1727	1777	1827	1877	1927	1977	2027
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	28.8	30	31.2	32.4	33.6	34.8	36	37.2	38.4	39.6	40.8	42	43.2	44.4	45.6	46.8	48	49.2	50.4	51.6	52.8	54	55.2	56.4	59.2	59.8	60	61.2	62.4	63.6	64.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	2077	2127	2177	2227	2277	2327	2377	2427	2477	2527	2577	2627	2677	2727	2777	2827	2877	2927	2977	3027	3077	3127	3177	3227	3277	3327	3377	3427	3477	3527	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	
Weight(Kg)*	66	67.2	68.4	69.6	70.8	72	73.2	74.4	75.6	76.8	78	79.2	80.4	81.6	82.8	84	85.2	86.4	87.6	88.8	90	91.2	92.4	93.6	94.8	96	97.2	98.4	99.6	101	

Motor Right Lower side-Y

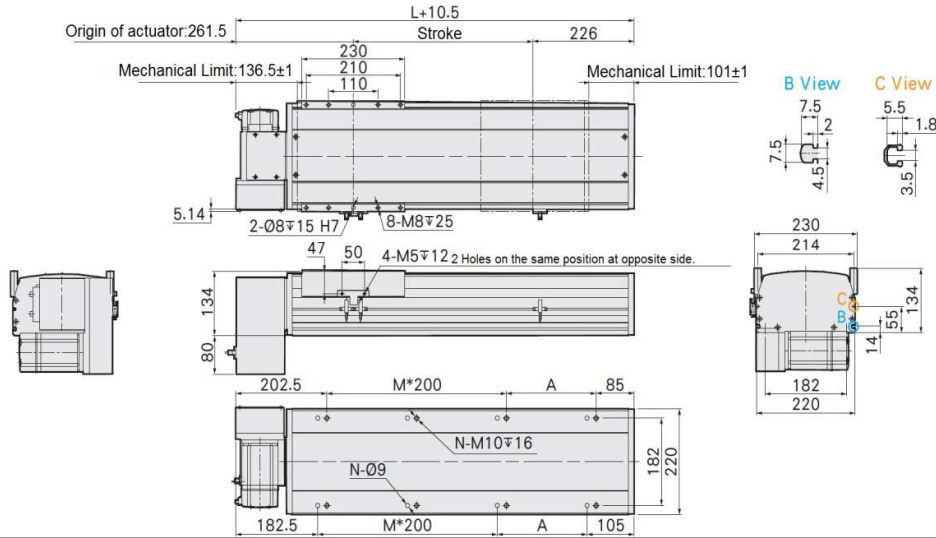


Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	527	577	627	677	727	777	827	877	927	977	1027	1077	1127	1177	1227	1277	1327	1377	1427	1477	1527	1577	1627	1677	1727	1777	1827	1877	1927	1977	2027
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Weight(Kg)*	28.8	30	31.2	32.4	33.6	34.8	36	37.2	38.4	39.6	40.8	42	43.2	44.4	45.6	46.8	48	49.2	50.4	51.6	52.8	54	55.2	56.4	59.2	59.8	60	61.2	62.4	63.6	64.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	2077	2127	2177	2227	2277	2327	2377	2427	2477	2527	2577	2627	2677	2727	2777	2827	2877	2927	2977	3027	3077	3127	3177	3227	3277	3327	3377	3427	3477	3527	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	
N	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	
Weight(Kg)*	66	67.2	68.4	69.6	70.8	72	73.2	74.4	75.6	76.8	78	79.2	80.4	81.6	82.8	84	85.2	86.4	87.6	88.8	90	91.2	92.4	93.6	94.8	96	97.2	98.4	99.6	101	

Linear Electric Actuator

Series AELB


Cat :

Motor Left Upper side-P

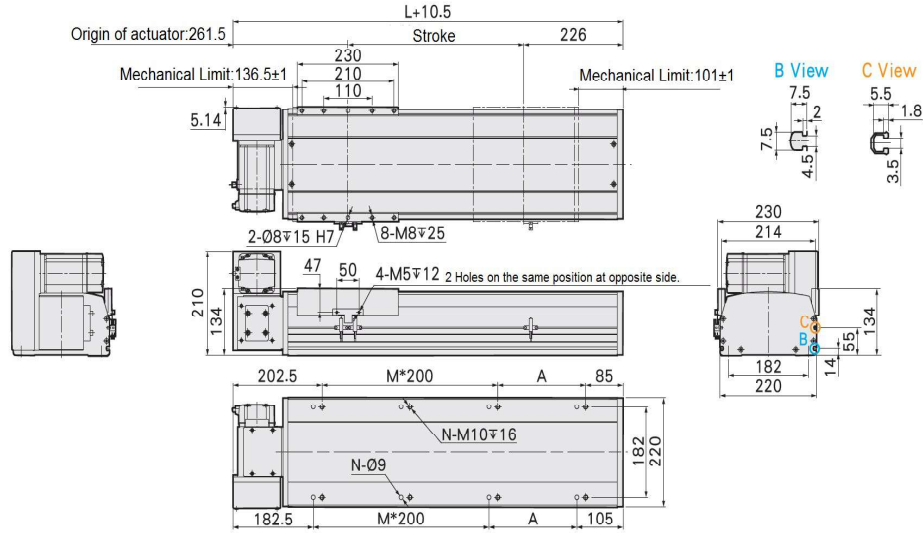

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	
L	527	577	627	677	727	777	827	877	927	977	1027	1077	1127	1177	1227	1277	1327	1377	1427	1477	1527	1577	1627	1677	1727	1777	1827	1877	1927	1977	2027	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8	
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20	20	
Weight(Kg)*	28.8	30	31.2	32.4	33.6	34.8	36	37.2	38.4	39.6	40.8	42	43.2	44.4	45.6	46.8	48	49.2	50.4	51.6	52.8	54	55.2	56.4	59.2	59.8	60	61.2	62.4	63.6	64.8	
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050		
L	2077	2127	2177	2227	2277	2327	2377	2427	2477	2527	2577	2627	2677	2727	2777	2827	2877	2927	2977	3027	3077	3127	3177	3227	3277	3327	3377	3427	3477	3527		
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50		
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	16	16	
N	20	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	36	36	
Weight(Kg)*	66	67.2	68.4	69.6	70.8	72	73.2	74.4	75.6	76.8	78	79.2	80.4	81.6	82.8	84	85.2	86.4	87.6	88.8	90	91.2	92.4	93.6	94.8	96	97.2	98.4	99.6	101		

Motor Right Upper side-X

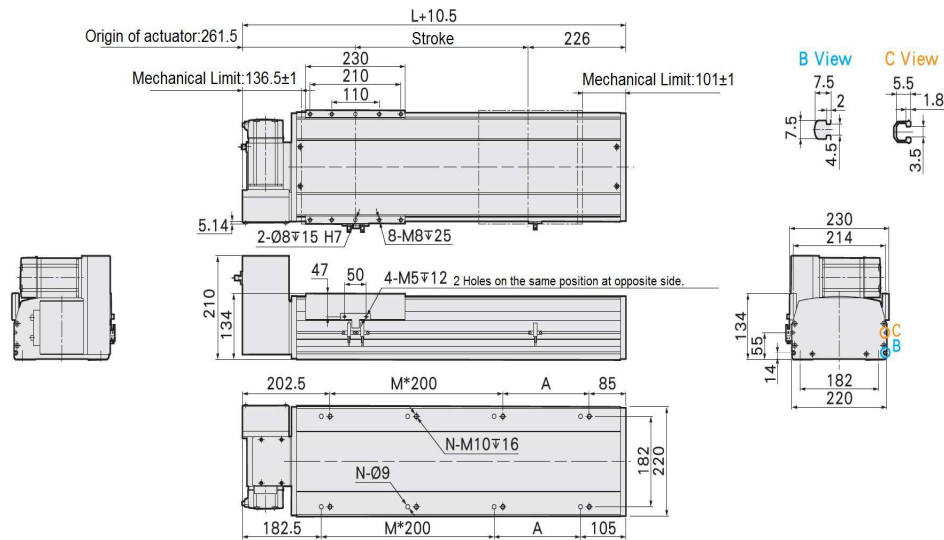

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550
L	527	577	627	677	727	777	827	877	927	977	1027	1077	1127	1177	1227	1277	1327	1377	1427	1477	1527	1577	1627	1677	1727	1777	1827	1877	1927	1977	2027
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8
N	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20	20
Weight(Kg)*	28.8	30	31.2	32.4	33.6	34.8	36	37.2	38.4	39.6	40.8	42	43.2	44.4	45.6	46.8	48	49.2	50.4	51.6	52.8	54	55.2	56.4	59.2	59.8	60	61.2	62.4	63.6	64.8
Stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	
L	2077	2127	2177	2227	2277	2327	2377	2427	2477	2527	2577	2627	2677	2727	2777	2827	2877	2927	2977	3027	3077	3127	3177	3227	3277	3327	3377	3427	3477	3527	
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
M	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	16	16
N	20	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	36	36
Weight(Kg)*	66	67.2	68.4	69.6	70.8	72	73.2	74.4	75.6	76.8	78	79.2	80.4	81.6	82.8	84	85.2	86.4	87.6	88.8	90	91.2	92.4	93.6	94.8	96	97.2	98.4	99.6	101	

Linear Electric Actuator

Series AELB

Cat :

How to order

AELB220

	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Lead</th></tr> <tr><td>40</td><td>40mm</td></tr> </table>	Lead		40	40mm	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Stroke</th></tr> <tr><td colspan="2">0050-3500mm</td></tr> </table>	Stroke		0050-3500mm		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Position</th></tr> <tr><td>L</td><td>Left Side</td></tr> <tr><td>R</td><td>Right Side</td></tr> <tr><td>P</td><td>Left Upper</td></tr> <tr><td>Q</td><td>Left Lower</td></tr> <tr><td>X</td><td>Right Upper</td></tr> <tr><td>Y</td><td>Right Lower</td></tr> </table>	Motor Position		L	Left Side	R	Right Side	P	Left Upper	Q	Left Lower	X	Right Upper	Y	Right Lower	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Specification</th></tr> <tr><th colspan="2">AC Servo</th></tr> <tr><td>D</td><td>Delta</td></tr> <tr><td>Y</td><td>Yaskawa</td></tr> <tr><td>M</td><td>Mitsubishi</td></tr> <tr><td>P</td><td>Panasonic</td></tr> <tr><td>V</td><td>INVT</td></tr> <tr><td>T</td><td>Others</td></tr> </table>	Motor Specification		AC Servo		D	Delta	Y	Yaskawa	M	Mitsubishi	P	Panasonic	V	INVT	T	Others	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor Power</th></tr> <tr><th colspan="2">AC Servo</th></tr> <tr><td>E</td><td>750W</td></tr> </table>	Motor Power		AC Servo		E	750W											
Lead																																																												
40	40mm																																																											
Stroke																																																												
0050-3500mm																																																												
Motor Position																																																												
L	Left Side																																																											
R	Right Side																																																											
P	Left Upper																																																											
Q	Left Lower																																																											
X	Right Upper																																																											
Y	Right Lower																																																											
Motor Specification																																																												
AC Servo																																																												
D	Delta																																																											
Y	Yaskawa																																																											
M	Mitsubishi																																																											
P	Panasonic																																																											
V	INVT																																																											
T	Others																																																											
Motor Power																																																												
AC Servo																																																												
E	750W																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Brake</th></tr> <tr><td></td><td>Without Brake</td></tr> <tr><td>B</td><td>With Brake</td></tr> </table>	Brake			Without Brake	B	With Brake	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Encoder Type</th></tr> <tr><td></td><td>Incremental</td></tr> <tr><td>A</td><td>Absolute</td></tr> </table>	Encoder Type			Incremental	A	Absolute	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Communication Type</th></tr> <tr><td></td><td>Basic Type</td></tr> <tr><td>C0</td><td>Modbus</td></tr> <tr><td>C1</td><td>CAN Open</td></tr> <tr><td>C2</td><td>Ether CAT</td></tr> <tr><td>C3</td><td>PROFINET</td></tr> <tr><td>C4</td><td>PROFIBUS</td></tr> <tr><td>C5</td><td>Ethernet/IP</td></tr> <tr><td>C6</td><td>Other Protocol - 1</td></tr> <tr><td>C7</td><td>Other Protocol - 2</td></tr> <tr><td>C8</td><td>Own Protocol -1*</td></tr> <tr><td>C9</td><td>Own Protocol -2*</td></tr> </table>	Communication Type			Basic Type	C0	Modbus	C1	CAN Open	C2	Ether CAT	C3	PROFINET	C4	PROFIBUS	C5	Ethernet/IP	C6	Other Protocol - 1	C7	Other Protocol - 2	C8	Own Protocol -1*	C9	Own Protocol -2*	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Motor & Encoder Cable</th></tr> <tr><td>1</td><td>1m</td></tr> <tr><td>3</td><td>3m</td></tr> <tr><td>5</td><td>5m</td></tr> <tr><td>T</td><td>10m</td></tr> </table>	Motor & Encoder Cable		1	1m	3	3m	5	5m	T	10m	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">I/O Cable</th></tr> <tr><td>N</td><td>Without Cable (Stand.)</td></tr> <tr><td>1</td><td>1m</td></tr> <tr><td>A</td><td>1.5m</td></tr> <tr><td>2</td><td>2m</td></tr> </table>	I/O Cable		N	Without Cable (Stand.)	1	1m	A	1.5m	2	2m
Brake																																																												
	Without Brake																																																											
B	With Brake																																																											
Encoder Type																																																												
	Incremental																																																											
A	Absolute																																																											
Communication Type																																																												
	Basic Type																																																											
C0	Modbus																																																											
C1	CAN Open																																																											
C2	Ether CAT																																																											
C3	PROFINET																																																											
C4	PROFIBUS																																																											
C5	Ethernet/IP																																																											
C6	Other Protocol - 1																																																											
C7	Other Protocol - 2																																																											
C8	Own Protocol -1*																																																											
C9	Own Protocol -2*																																																											
Motor & Encoder Cable																																																												
1	1m																																																											
3	3m																																																											
5	5m																																																											
T	10m																																																											
I/O Cable																																																												
N	Without Cable (Stand.)																																																											
1	1m																																																											
A	1.5m																																																											
2	2m																																																											
<div style="border: 1px solid black; display: inline-block; padding: 2px;"> Note : * Based on Motor make </div>																																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2">Customization Order no</th></tr> <tr><td>XXXX</td><td>Special Requirements</td></tr> </table>						Customization Order no		XXXX	Special Requirements																																																			
Customization Order no																																																												
XXXX	Special Requirements																																																											

Example :1

Ordering no. for Rodless belt drive electric actuator 220mm size,40mm belt lead,150 mm stroke with Delta 750W servo motor mounted at the left side, with 3m Motor cable.

AELB220400150L-DE-3N

Example :2

Ordering no. for Rodless belt drive electric actuator 220mm size,40mm belt lead,150 mm stroke without Delta 750W servo motor mounted at the left side.

AELB220400150L-DE